


OPTIMA 650

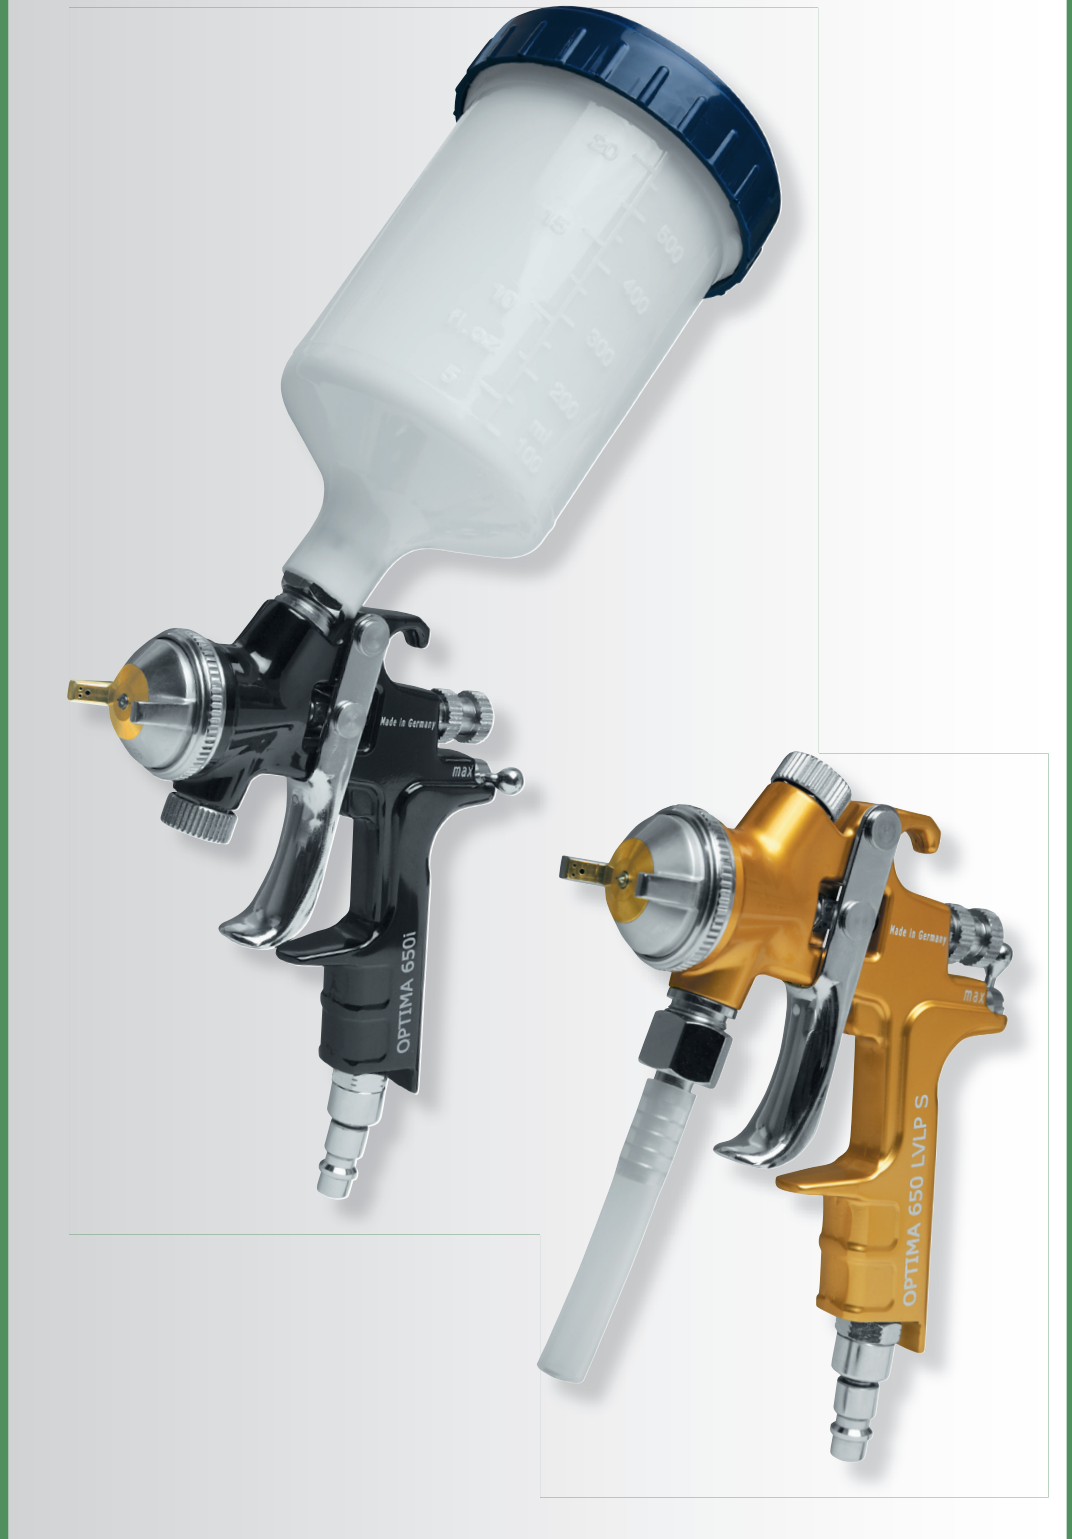

For highest requirements

OPTIMA 650
Overspray reduced and LVLP


OPTIMA 650

Overspray reduced and LVLP

The **OPTIMA 650** – is an entirely new all-round spray gun designed for all applications.

The excellent cost / performance ratio makes this spray gun particularly suited for the manufacturing sector as well as a filler / primer gun. Both gravity feed and suction models are available with either reduced overspray (OPTIMA 650i) or minimum overspray (OPTIMA 650 LVLP).

All models are equipped with an air regulation, a round / flat jet regulation, a material regulation and a needle sealing which is adjustable from outside. Nozzles range in a size from 0.5 to 2.5 mm. A 3/8" pot connection is standard for both gravity feed and suction versions. Cups from other OPTIMA products are compatible with the new OPTIMA 650 and 650i. All versions of the OPTIMA 650 are equipped with an absolute flexible air connection which is not only rotating but also swivelling. The OPTIMA 650 is a perfect all-round spray gun which offers besides excellent spray qualities a good handling with the optimum center of gravity.

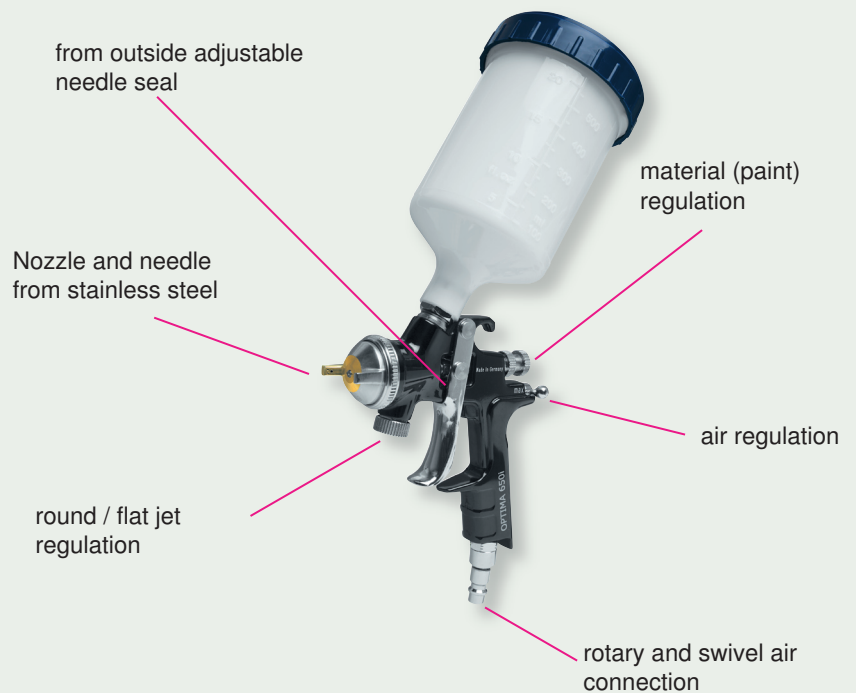

OPTIMA 650 i

Optimal spray pressure:	2.0 - 2.5 bar (28 - 36 psi)
Air consumption:	205 - 240 l/min (7.3 - 8.5 cfm)
Nozzle/needle:	stainless steel
Weight without pot:	480 g
Order no.:	1393



OPTIMA 650 i S

Optimal spray pressure:	2.0 - 2.5 bar (28 - 36 psi)
Air consumption:	205 - 240 l/min (7.3 - 8.5 cfm)
Nozzle/needle:	stainless steel
Weight without pot:	480 g
Order no.:	1394



OPTIMA 650 LVLP

Optimal spray pressure:	2.0 - 2.5 bar (28-36 psi)
Air consumption:	210 - 250 l/min (7.4 - 8,8 cfm)
Nozzle/needle:	stainless steel
Weight without pot:	480 g
Order no.:	1395



OPTIMA 650 LVLP S

Optimal spray pressure:	2.0 - 2.5 bar (28 - 36 psi)
Air consumption:	210 - 250 l/min (7.4 - 8,8 cfm)
Nozzle/needle:	stainless steel
Weight without pot:	480 g
Order no.:	1396

Available nozzle sizes for all models: 0,5 - 0,8 - 1,0 - 1,2 - 1,3 - 1,4 - 1,5 - 1,6 - 1,8 - 2,5 - 3,0



Bersch & Fratscher GmbH

Seligenstädter Straße • D-63791 Karlstein am Main • Germany

Phone: +49 / 6188 787-0 • Telefax: +49 / 6188 7341

E-Mail: export@bersch-fratscher.de • Internet: www.bersch-fratscher.de