

Fast-Set Plural-Component Equipment and Accessories

For Foam and Coatings Applications



PROVEN QUALITY. LEADING TECHNOLOGY.

Engineered for Performance



Complete systems for superior results

Whether you're spraying polyurethane foam insulation in a home, commercial building or rooftop, or applying polyurea to coat a bedliner or to protect any other substrate, Graco Plural-Component Proportioner Systems help you get the job done with superior results.

You'll discover that Graco equipment is easy to use, rugged, reliable and easy to maintain.

From entry-level models to high-output systems, there's a Graco Plural-Component Proportioning System that's ideal for your application.

Applications:

Polyurethane Foam

- Residential wall insulation
- Rim and band joist
- Roof insulation
- Aerospace
- Commercial walls

Coatings

- Concrete joint filling
- Marine and shipbuilding
- Potable water
- Wastewater treatment
- Truck bedliners
- Secondary containment
- Adhesives and caulk
- Waterproofing
- Tank and pipe coating
- Foundations

Build a complete system in just a few steps

1 SELECT A PROPORTIONER

Choose an air, electric or hydraulic model.

KEY FEATURES:

- Quick knockdown fluid sections
- Optional data reporting capabilities
- Foam models rated at 138 bar (2000 psi, 13.8 MPa)
- Coatings models rated up to 240 bar (3500 psi, 24.0 MPa)

2 SELECT HEATED HOSES

Choose from pressure ratings of 138 to 240 bar (2000 psi or 3500 psi, 13.8 to 24.0 MPa). Choose 3/8" in or 1/2" in internal diameter.

3 SELECT HEATED WHIP HOSE

Choose from pressure ratings of 138 to 240 bar (2000 psi or 3500 psi, 13.8 to 24.0 MPa). Choose 1/4" in or 3/8" in internal diameter.

4 SELECT A GUN

Choose an air-purge, mechanical-purge or liquid-purge gun with a round or flat pattern.


5 SELECT SUPPLY PROCESSING EQUIPMENT

5 SUPPLY PUMP

Choose from diaphragm or piston pumps for standard materials in drum-mount or wall-mount. Select a 2:1 piston pump for materials with higher viscosities.

6 AGITATOR KITS

Choose a kit to agitate your resin for a consistent coating. Graco's patented Twistork™ agitators are very low shear to minimize material frothing.

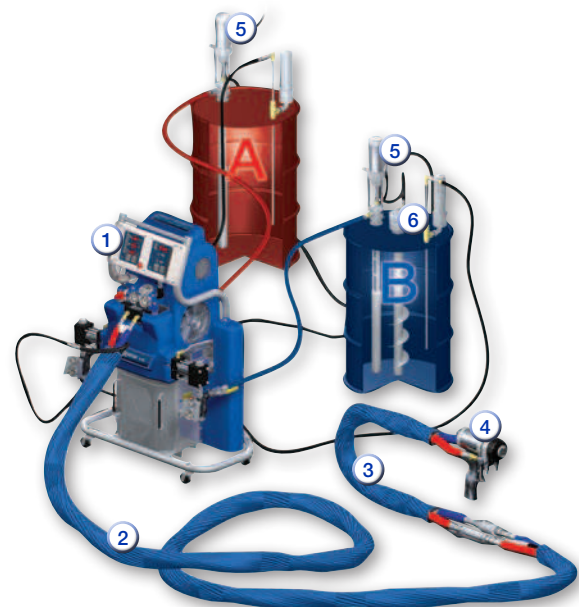

Air, Electric and hydraulic systems

Which system is right for you?

AIR-DRIVEN

- Entry-level proportioning system
- Low-output applications
- Easy to use
- Minimal system feedback for operator



Reactor™ A-25

ELECTRIC

- The most popular proportioning system
- High value for great performance
- Mid- to high-output applications
- Provides operator with material data and system diagnostics for total control

Reactors E-10, E-20, E-30, E-XP1, E-XP2



HYDRAULIC

- Top of the line system for high-production professionals
- Highest value for the greatest performance
- High-output applications
- Ideal for in-plant OEMs
- Provides superior, uninterrupted performance
- Provides operator with material data and system diagnostics for total control

Reactors H-25, H-40, H-50, H-XP2, H-XP3



PERFORMANCE CHARTS

Use these charts to help identify the proportioner that will work most efficiently with each mix chamber. Flow rates are based on a material viscosity of 60 cps. See examples below.

HOW TO USE THESE GRAPHS ▶

- Select spray pressure
- Select mix chamber or flow rate
- Choose proportioner model

Note: Darker shading includes proportioner models shown in lighter shaded areas.

FOAM EXAMPLE


Mix chamber: AR6060 (03)
 Pressure: 86 bar (1250 psi, 8.6 MPa)
 Flow rate: 10 liter/min*
 Proportioners H-25, E-30, H-40, H-50

COATING EXAMPLE


Mix chamber: AR2929 (00)
 Pressure: 103 bar (1500 psi, 10.3 MPa)
 Flow rate: 3,4 liter/min*
 Proportioners E-XP1, E-XP2, H-XP2, H-XP3

* Output of flat tip will be slightly less than round equivalent.

PROPORTIONERS FOR FOAM

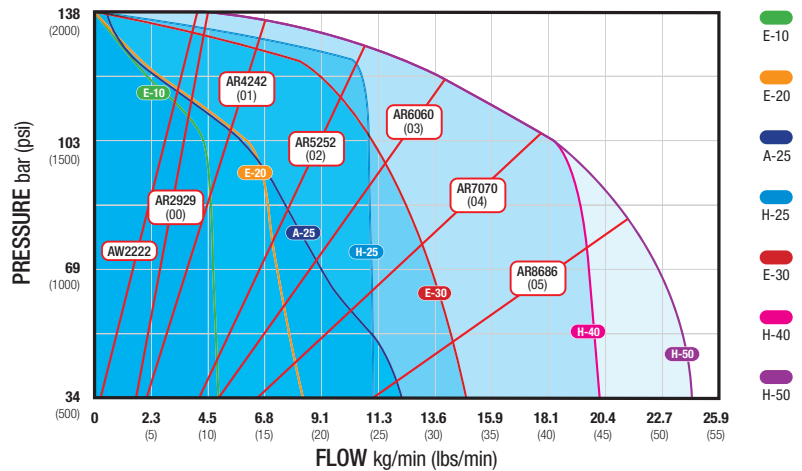

PROPORTIONERS FOR COATINGS

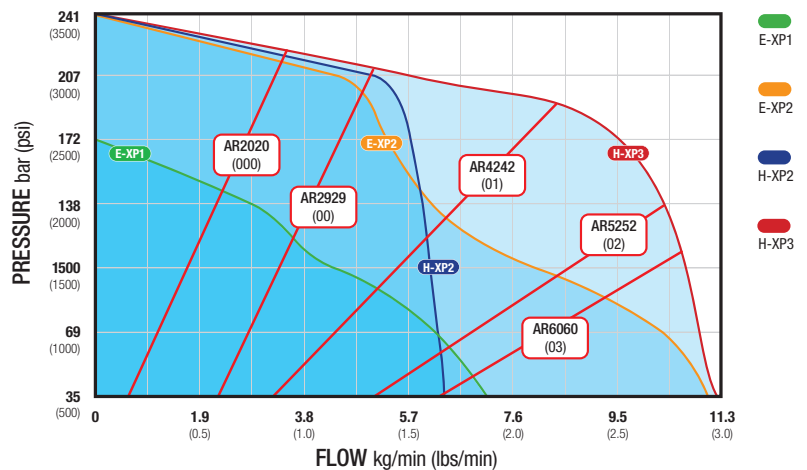

Electric Proportioners

Preferred choice for medium- to high-output foam or coatings applications

Reactor E-Series: High performance at an outstanding value

Equipped with material data and system diagnostics, Reactor E-Series proportioners provide total control. Advanced features provide longer equipment life, more uptime for your spray day and overall Graco reliability.

- Circulation valves with longer-lasting seals
- Longer-lasting modular heater control boards that reduce downtime
- Heat transformers that don't require tap settings
- Models include: E-10, E-20, E-30, E-XP1, E-XP2

Digital Heat and Pressure Controls

Allow you to precisely program temperatures and pressures, and monitor machine performance

Powerful Hybrid Heaters

Provide better temperature control

ISO Pump Lube System

Prevents isocyanate crystallization on the pump seal and shaft

Quick Knockdown Lower Pumps

For easy disassembly and maintenance

Rugged, Portable Design

Easy maneuverability around the jobsite



Electric Motor

Provides superior efficiency and performance

Circulation Valves

Reduce isocyanate crystallization while offering more controlled pressure balancing

Hose Control

Reliable and accurate hose connection system. Flexible fluid temperature sensor allows you to monitor and control temperature closer to the gun.

Heat Platform

Circuit board is divided into easy-to-replace modules that simplify troubleshooting and maintenance, maximizing spray time

COMPACT AND PORTABLE



◀ Reactor E-10

Get smaller jobs done fast without sacrificing performance. Graco's portable E-10 sprayers are ideal for plural-component spray, joint-fill jobs and touch-ups.

- Electric power is low draw and plugs into standard outlets
- Intuitive start, stop and digital temperature display with single knob operation
- Easy-to-service fluid section reduces maintenance and increases productivity
- Electric motor improves performance and reduces operating costs
- Heaters and hose give up to 2000 watts to pre-heat circulating material

Applications

Foam Insulation

- Rim joists
- Roof patching
- Prep work
- Window repair

Coatings

- Small industrial jobs
- Concrete joint filling and flooring applications
- Small tank spraying using cold spray polyurea
- Industrial maintenance
- Hybrid polyureas

Hydraulic Proportioners

Top of the line equipment for high-production professionals

Reactor H-Series: Superior power and performance

Graco's line of hydraulic Reactors brings increased yield and performance to high-output spraying. Hydraulic systems are the choice of spraying professionals who want to reap the benefits of the latest spraying technologies and add productivity to boost their bottom line.

- Adjustable pressure imbalance for tighter or looser ratio error detection
- Flexibility to change A or B pumps for fixed ratio application other than 1:1
- Models include: H-25, H-40, H-50, H-XP2, H-XP3 and H-VR

Digital Heat and Pressure Controls

Allow you to precisely program temperatures and pressures, and monitor machine performance

Circulation Valves

Reduce isocyanate crystallization while offering more controlled pressure balancing

Hose Control

Reliable and accurate hose connection system. Flexible fluid temperature sensor allows you to monitor and control temperature closer to the gun.

ISO Pump Lube System

Prevents isocyanate crystallization on the pump seal and shaft

Powerful Hybrid Heaters

Heat material quickly and maintain temperature set points – even when spraying at maximum flow rates

Horizontal Pumps

Positive displacement pumps are easy to service and provide smoother changeover for maintaining best spray pattern

Troubleshooting Y-Strainer

Analog temperature and pressure gauges are standard

Heat Platform

Circuit board is divided into easy-to-replace modules that simplify troubleshooting and maintenance, maximizing spray time



VARIABLE RATIO DISPENSING

◀ Reactor H-VR – Variable Ratio Hydraulic Proportioner

The Reactor H-VR combines proven Graco hydraulic Reactor technology with variable ratio capabilities.

- For applications that require a range or difference in volumetric ratio
- Infinitely adjustable volume ratio from 1:1 to 2.5:1
- Dispenses polyurethane foams and polyurea coatings
- Rated for 240 bar max working pressure
- 15,300 watt heaters

Ordering Information

Gun and hose sold separately

256886 Reactor H-VR, 230-volt, 3-ph

256887 Reactor H-VR, 400-volt, 3-ph



Air-Driven Proportioners

Easy-to-use, entry-level system for low-output applications

Reactor A-25: Superior performance with long-lasting durability

The Reactor A-25 is a Graco-engineered spray foam proportioner that gives you the reliability you expect on the jobsite. It maintains consistent temperature control, even when you're spraying at maximum flow rates - resulting in better quality foam.

- Maintains temperature setpoints for better yield
- Maintains consistent output pressure for uniform-spray pattern
- Easy to operate and maintain
- Best choice for affordability and long-lasting durability

DataTrak™ Control

- Resettable counter tracks material usage

Three Heat Zones

- Three independent heat zones – ISO, resin and hose heat
 - Provide accurate heat control for reliable spraying to handle different chemical viscosities
 - Digital temperature controls

Recirculation Manifold

- A quick, easy way to balance system pressures

NXT™ Air Motor

- Low air consumption for increased efficiency
- Muffler provides low operating noise levels
- Air valve provides smooth and rapid changeover



Hybrid Heater

- Provides better temperature control

Quick Knockdown Lower Pumps

- For easy disassembly and maintenance

ISO Pump Lube System

- Prevents isocyanate crystallization on the pump seal and shaft



Transfer Pumps and Agitator Kits

Engineered for more output, better performance and great value

T1 AND T2 TRANSFER PUMP FAMILY ▼

	Part Number	Ratio	Maximum output – continuous	Maximum output – intermittent	Maximum input air pressure	Maximum output fluid pressure	Maximum ambient temperature	Maximum fluid temperature	Weight	Dimensions	Manual Number
T1	256200	2:1	9.5 lpm (2.5 gpm)	15 lpm (4.0 gpm)	12 bar (180 psi, 1.2 MPa)	25 bar (360 psi, 2.5 MPa)	50°C (120°F)	82°C (180°F)	8.4 kg (18 lb)	130.8 cm (51.5 in) length; 66 mm (2.6 in) diameter (cap)	312766
T2	295616	2.25:1	19 lpm (5.0 gpm)	28 lpm (7.5 gpm)	12 bar (180 psi, 1.2MPa)	28 bar (405 psi, 2.8MPa)	50°C (120°F)	88°C (190°F)	9.5 kg (21 lb)	137 cm (54 in) length; 89 mm (3.5 in) diameter (cap)	311882

- The T2 design doubles the output – from 9.5l to 19l – able to keep up with high-output proportioners
- The smaller T1 pump allows for lower 2:1 output, ideal for spraying applications
- Quick-disconnect feature allows easier drum removal and faster change-outs
- Improved fluid intake easily handles higher viscosity materials – even in cold conditions
- Reliable and cost-effective



Quick-release Bung Adapter

For easy drum removal without interference from hose connections

Corrosion-resistant Components

Stainless steel wetted parts

PTFE Seals

Improved performance for less maintenance



TWISTORK HELIX MIXER

- Air-operated with a variable-speed, 1.5 HP motor, capable of 7 bar (100 psi, 0.7 MPa) maximum working pressure
- Available in carbon steel and stainless steel
- Built for long-life, corrosion-resistance and structural integrity
- Patented, helix-shaped mixing blades are threaded through a closed-head drum's standard bung opening
- Heavy-duty agitator features lube-free assembly, eliminating fluid contamination
- Gentle mixing reduces degradation and splashing, compared to propeller blades

Graco Proportioners for Foam

Technical Specifications and Ordering Information



	AIR-DRIVEN	ELECTRIC (E SERIES)	
MODEL	A-25	E-10	E-20
Maximum Working Pressure	138 bar (2000 psi, 13.8 MPa) 800 liter air consumption@ 6,8 bar (100 psi)	138 bar (2000 psi, 13.8 MPa)	138 bar (2000 psi, 13.8 MPa)
Minimum Working Pressure	N/A	N/A	N/A
Maximum Hose Length	64m (210 ft)	32m (105 ft)	64m (210 ft)
Maximum Fluid Temp	88°C (190°F)	71°C (160°F)	88°C (190°F)
Output	11.4 kg (25 lb) / min	5.4 kg (12 lb) /min	9 kg (20 lb) /min
Weight	140 kg	Heated: 72 kg Unheated: 68 kg	155 kg
Ordering Information	<p>WITH 6.0 KW HEATER:</p> <p>40A-230V, 1-ph 262614 (Bare) AP2614 (AP Pkg) CS2614 (CS Pkg) P22614 (P2 Pkg)</p> <p>32A-230V, 3-ph 262614 (Bare) AP2614 (AP Pkg) CS2614 (CS Pkg) P22614 (P2 Pkg)</p> <p>18.5A-4V, 3-ph (4-wire) 262614 (Bare) AP2614 (AP Pkg) CS2614 (CS Pkg) P22614 (P2 Pkg)</p>	<p>WITH 1.7 KW HEATER:</p> <p>15A-120V, 2-cord 249570 (Bare) AP9570 (AP Pkg) CS9570 (CS Pkg)</p> <p>WITH 2.0 KW HEATER:</p> <p>10A-240V, 2-cord 249571 (Bare) AP9571 (AP Pkg) CS9571 (CS Pkg)</p> <p>20A-240V, 1-cord 249572 (Bare) AP9572 (AP Pkg) CS9572 (CS Pkg)</p> <p>UNHEATED AMBIENT SYSTEM:</p> <p>15A-120V 249576 (Bare) 249806 (Pkg)</p> <p>10A-240V 249577 (Bare) 249808 (Pkg)</p>	<p>WITH 6.0 KW HEATER:</p> <p>48A-230V, 1-ph 259025 (Bare) AP9025 (AP Pkg) CS9025 (CS Pkg) P29025 (P2 Pkg)</p> <p>32A-230V, 3-ph 259034 (Bare) AP9034 (AP Pkg) CS9034 (CS Pkg) P29034 (P2 Pkg)</p> <p>24A-400V, 3-ph 259030 (Bare) AP9030 (AP Pkg) CS9030 (CS Pkg) P29030 (P2 Pkg)</p>
Operation manual	3A1569	311075	312065
Repair manual	3A1570	311075	312066

Packages include spray hose, whip hose and gun.



					HYDRAULIC (H SERIES)							
					E-30		H-25		H-40		H-50	
					138 bar (2000 psi, 13.8 MPa)		138 bar (2000 psi, 13.8 MPa)		138 bar (2000 psi, 13.8 MPa)		117 bar (1700 psi, 11.7 MPa) 1-ph 138 bar (2000 psi, 13.8 MPa) 3-ph	
					N/A		59 bar (850 psi, 5.9 MPa)		41 bar (600 psi, 4.1 MPa)		41 bar (600 psi, 4.1 MPa)	
					94 m (310 ft)		94 m (310 ft)		125m (410 ft)		125m (410 ft)	
					88°C (190°F)		88°C (190°F)		88°C (190°F)		88°C (190°F)	
					13.5 kg (30 lb) /min		10 kg (22 lb) /min		20 kg (45 lb) /min		23.6 kg (52 lb) /min	
					181 kg		8 kW: 243 kg 15 kW: 255 kg		271 kg		271 kg	
					WITH 10.2 KW HEATER:		WITH 8.0 KW HEATER:		WITH 12.0 KW HEATER:		WITH 12.0 KW HEATER:	
					78A-230V, 1-ph 259026 (Bare) AP9026 (AP Pkg) CS9026 (CS Pkg) P29026 (P2 Pkg)		69A-230V, 1-ph 255400 (Bare) AP5400 (AP Pkg) CS5400 (CS Pkg) P25400 (P2 Pkg)		100A-230V, 1-ph 253400 (Bare) AP3400 (AP Pkg) P23400 (P2 Pkg)		100A-230V, 1-ph 253725 (Bare) AP3725 (AP Pkg) P23725 (P2 Pkg)	
					50A-230V, 3-ph 259035 (Bare) AP9035 (AP Pkg) CS9035 (CS Pkg) P29035 (P2 Pkg)		46A-230V, 3-ph 255401 (Bare) AP5401 (AP Pkg) CS5401 (CS Pkg) P25401 (P2 Pkg)		WITH 15.3 KW HEATER: 71A-230V, 3-ph 253401 (Bare) AP3401 (AP Pkg) P23401 (P2 Pkg)		WITH 15.3 KW HEATER: 71A-230V, 3-ph 253726 (Bare) AP3726 (AP Pkg) P23726 (P2 Pkg)	
					34A-400V, 3-ph 259031 (Bare) AP9031 (AP Pkg) CS9031 (CS Pkg) P29031 (P2 Pkg)		35A-400V, 3-ph 255402 (Bare) AP5402 (AP Pkg) CS5402 (CS Pkg) P25402 (P2 Pkg)		41A-400V, 3-ph 253402 (Bare) AP3402 (AP Pkg) P23402 (P2 Pkg)		41A-400V, 3-ph 253727 (Bare) AP3727 (AP Pkg) P23727 (P2 Pkg)	
					WITH 15.3 KW HEATER:		WITH 15.3 KW HEATER:		WITH 20.4 KW HEATER: 95A-230V, 3-ph 253407 (Bare) AP3407 (AP Pkg) P23407 (P2 Pkg)		WITH 20.4 KW HEATER: 95A-230V, 3-ph 256505 (Bare) AP6505 (AP Pkg) P26505 (P2 Pkg)	
					100A-230V, 1-ph 259057 (Bare) AP9057 (AP Pkg) CS9057 (CS Pkg) P29057 (P2 Pkg)		100A-230V, 1-ph 255406 (Bare) AP5406 (AP Pkg) CS5406 (CS Pkg) P25406 (P2 Pkg)		52A-400V, 3-ph 253408 (Bare) AP3408 (AP Pkg) P23408 (P2 Pkg)		52A-400V, 3-ph 256506 (Bare) AP6506 (AP Pkg) P26506 (P2 Pkg)	
					62A-230V, 3-ph 259058 (Bare) AP9058 (AP Pkg) CS9058 (CS Pkg) P29058 (P2 Pkg)		59A-230V, 3-ph 255407 (Bare) AP5407 (AP Pkg) CS5407 (CS Pkg) P25407 (P2 Pkg)					
					35A-400V, 3-ph 259059 (Bare) AP9059 (AP Pkg) CS9059 (CS Pkg) P29059 (P2 Pkg)		35A-400V, 3-ph 255408 (Bare) AP5408 (AP Pkg) CS5408 (CS Pkg) P25408 (P2 Pkg)					
					312065		312062		312062		312062	
					312066		312063		312063		312063	

Graco Proportioners for Coatings

Technical Specifications and Ordering Information



		ELECTRIC (E SERIES)	
MODEL	E-XP1	E-XP2	
Maximum Working Pressure	172 bar (2500 psi, 17.2 MPa)	240 bar (3500 psi, 24.0 MPa)	
Minimum Working Pressure	N/A	N/A	
Maximum Hose Length	64m (210 ft)	94m (310 ft)	
Maximum Fluid Temp	88°C (190°F)	88°C (190°F)	
Output	3.8 lpm (1.0 gpm)	7.6 lpm (2.0 gpm)	
Weight	155 kg	198 kg	
Ordering Information	<p>WITH 10.2 KW HEATER:</p> <p>69A-230V, 1-ph 259024 (Bare) AP9024 (AP Pkg) P29024 (P2 Pkg)</p> <p>43A-230V 3-ph 259033 (Bare) AP9033 (AP Pkg) P29033 (P2 Pkg)</p> <p>24A-400V, 3-ph 259029 (Bare) AP9029 (AP Pkg) P29029 (P2 Pkg)</p>	<p>WITH 15.3 KW HEATER:</p> <p>100A-230V, 1-ph 259028 (Bare) AP9028 (AP Pkg) P29028 (P2 Pkg)</p> <p>62A-230V, 3-ph 259036 (Bare) AP9036 (AP Pkg) P29036 (P2 Pkg)</p> <p>35A-400V, 3-ph 259032 (Bare) AP9032 (AP Pkg) P29032 (P2 Pkg)</p>	
Operation manual	312065	312065	
Repair manual	312066	312066	

Packages include spray hose, whip hose and gun.



HYDRAULIC (H SERIES)		
	H-XP2	H-XP3
	240 bar (3500 psi, 24.0 MPa)	240 bar (3500 psi, 24.0 MPa)
	83 bar (1200 psi, 8.3 MPa)	59 bar (850 psi, 5.9 MPa)
	94 m (310 ft)	125m (410 ft)
	88°C (190°F)	88°C (190°F)
	5.7 lpm (1.5 gpm)	10.6 lpm (2.8 gpm)
	255 kg (562 lb)	271 kg (597 lb)
	WITH 15.3 KW HEATER: <u>100A-230V, 1-ph</u> 255403 (Bare) AP5403 (AP Pkg) P25403 (P2 Pkg) <u>59A-230V, 3-ph</u> 255404 (Bare) AP5404 (AP Pkg) P25404 (P2 Pkg) <u>35A-400V, 3-ph</u> 255405 (Bare) AP5405 (AP Pkg) P25405 (P2 Pkg)	WITH 12.0 KW HEATER: <u>100A-230V, 1-ph</u> 253403 (Bare) AP3403 (AP Pkg) P23403 (P2 Pkg) WITH 20.4 KW HEATER: <u>95A-230V, 3-ph</u> 253404 (Bare) AP3404 (AP Pkg) P23404 (P2 Pkg) <u>52A-400V, 3-ph</u> 253405 (Bare) AP3405 (AP Pkg) P23405 (P2 Pkg)
	312062	312062
	312063	312063

Liquid-Purge Guns

Unprecedented features that will change the way you spray

Fusion® CS with ClearShot™ Technology – A new class of spray gun

Graco's new Fusion CS plural-component spray gun with ClearShot (CS) Technology delivers improved productivity and performance throughout the spray day. The secret of the revolutionary ClearShot Technology is the ClearShot Liquid which is inserted into the gun's handle. Every time you pull the trigger, ClearShot Liquid is dispensed into the mix chamber and helps remove any built-up chemical – keeping it clean.

CLEARSHOT TECHNOLOGY

- ClearShot Liquid helps remove built-up material – virtually eliminating drilling of mix chamber
- Maximizes daily spraying uptime and annual productivity
- Maintains patterns and maximizes each kit with a clean mix chamber, saving time and money on material



Liquid-Purge

- Reduces purge air by 75%, minimizing material blowback
- Gain flexibility and maneuverability to spray in small, tight areas

Industry-First Quick-Change Front End

- Swap out fluid head in seconds
- Non-stick polymer cover for easy cleanup
- "Air knife" – reduces material buildup

Variable Flow Setting

- Switch from large to small spray patterns in seconds
- Ten different settings


New Manifold

- Easy on/off valves
- Check valves block fluid flow when manifold is disconnected
- Quick filter screen change-outs



New ClearShot Cartridge

Keeps gun mix chamber clear

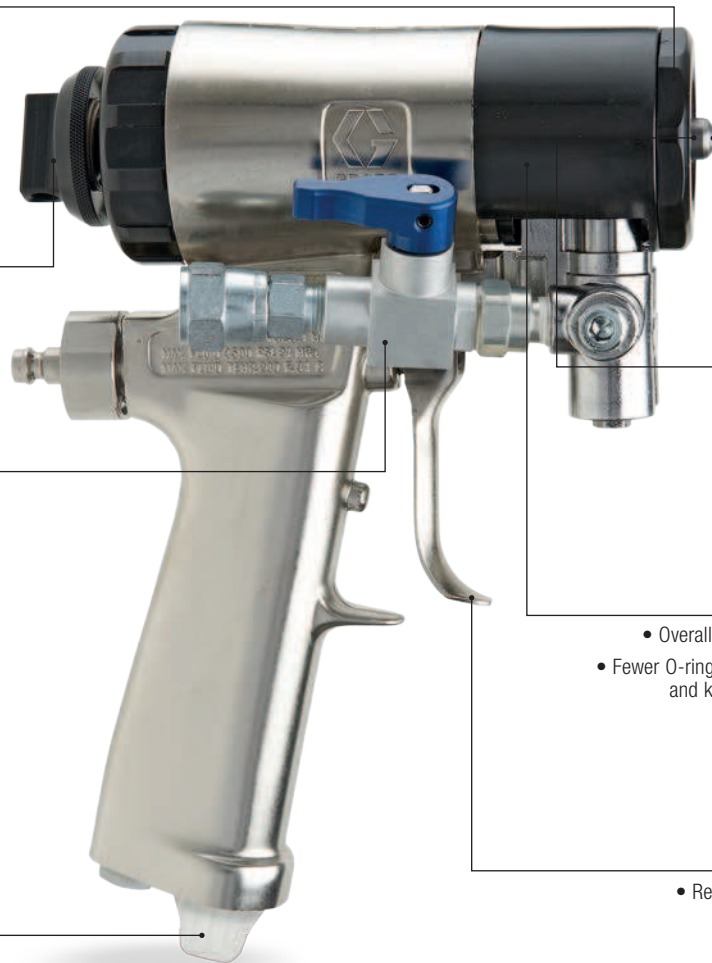

Chromex™-Coated Side Seals and Mix Chamber

- More resistance to corrosion and wear
- Save time and money in replacements over the long-term

Screw-in-Place Side Seals

- Overall maintenance is quicker and simpler
- Fewer O-rings ensure better crossover protection and keep appropriate mix and proportions of material for better end results

Faster/Shorter Trigger Pull

- Responsive trigger delivers quick shots
- Diminishes operator fatigue

Air-Purge Guns

Plural-component spraying made easy

Fusion AP – Easy to use, easy to maintain

- Air-blast tip cleaning reduces build-up and tip clogging
- Hardened stainless steel mix chambers are built to last
- Longer life side seals reduce maintenance and let you spray a wider range of materials – choose from hardened stainless steel or PolyCarballoy options
- Advanced mix module and tip design improves mixing
- Solvent-resistant components and O-rings let you soak the whole gun without swelling or damage
- Daily maintenance in a matter of seconds with the quick-shot grease port
- Easy-to-use design makes maintenance quick and easy




Quick-Release Fluid Housing

Easily change mix chambers without tools

Hand-Tightened Front Cap

Clean and maintain seals and mix chamber without tools

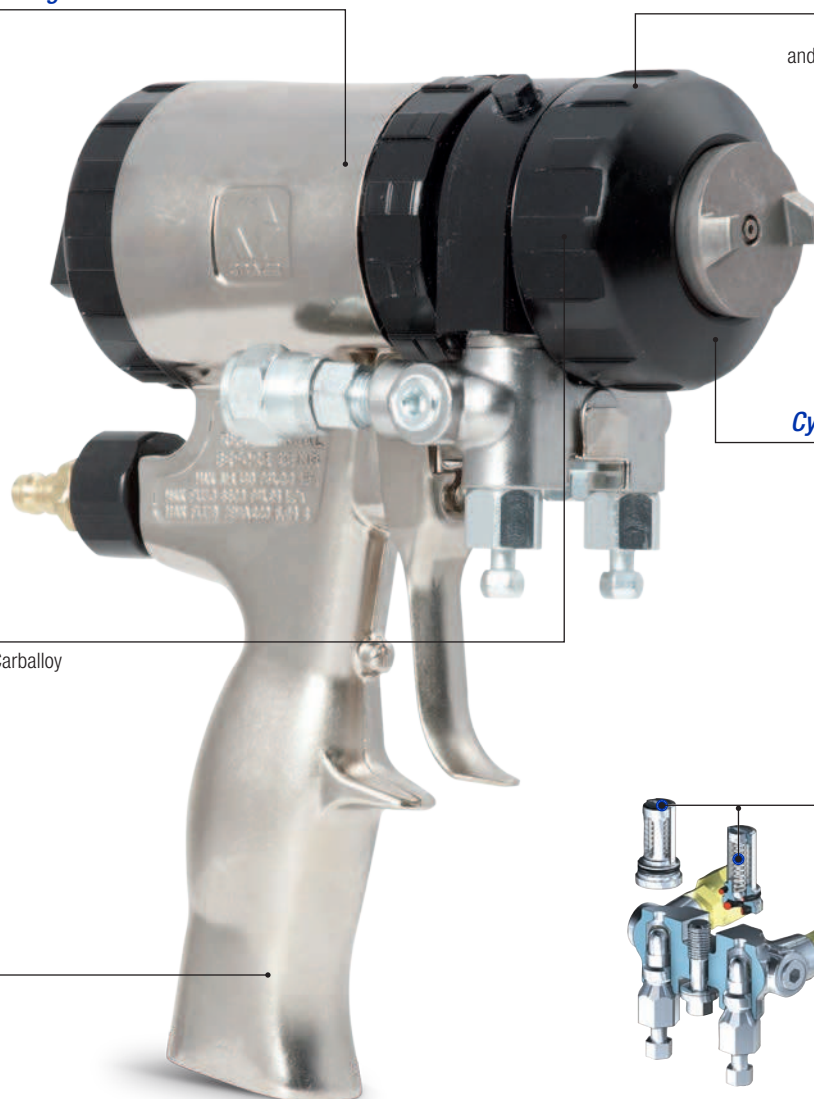

Cyclone-Mix™ Chamber

Hardened stainless steel construction for longer life

Durable Side Seals


Rugged stainless steel or PolyCarballoy construction for longer life

Ergonomic Handle

Smooth curved handle improves operator comfort and reduces fatigue

Check Valves with Screens

Cartridge design for easy maintenance



Air-Purge Guns

Plural-component spraying made easy

PROBLER™ P2 – Compact and ergonomic

Recognized by the industry for its superior performance, the P2 gun's light, easy-to-handle design lets you spray and maneuver easily – even in difficult spraying positions. At the end of the day, maintenance is easy. No cleaning small air passages with tiny drill bits. The P2 has check valves that separate the liquid portion and dry side of the gun.

- Responsive trigger action – double piston design provides more than 136 kg (300 pounds) of triggering force
- The mix chamber insert can be replaced without replacing the entire chamber
- Anti-crossover design virtually eliminates possibility of material entering the air piston

P2 ELITE

- P2 model's side blocks offer alternate hose routing configurations
- Allows access to ISO and resin filters without removing side blocks
- Allows use of additional accessories



Grease Fitting

For quick daily maintenance

Two-Piece Mix Chamber

Designed to reduce downtime

Powerful Dual Air Piston

- Provides strong trigger force
- Dramatically increases mix chamber pull-back pressure

Ergonomic Handle and Balanced Design

Comfortable, compact and lightweight



Mechanical-Purge Guns

Excellent material mix

Fusion MP – Designed for superior mixing

- Handles from very low output, thin mil applications to large, high flow, high-output applications just by changing the mix module and tip
- Easy mechanical cleaning – mix modules and tips are cleaned with a drill bit
- Smoother finish and better atomization
- Offers more advanced features than all other mechanical-purge guns combined

LONG-LASTING MIX MODULES PROVIDE EXCELLENT MIXING

- Advanced mix module and tip design provides excellent mix and material properties
- PolyCarballoy mix modules for proven long life
- CeramTip™ is durable and easy to change
- Significantly reduces repair and maintenance costs

Purge Rod

Easy-to-set, one piece rod for longer life

CeramTip

Durable and easy to change

Adjustable Front Packing

PolyCarballoy Mix Module

For proven long life

Ergonomic Handle

Smooth curved handle improves operator comfort and reduces fatigue

Check Valves with Screens

Cartridge design for easy maintenance



Graco Plural-Component Spray Guns

Technical Specifications




MODEL	LIQUID-PURGE FUSION CS	AIR-PURGE FUSION AP
Materials sprayed	Foam and coatings	Foam and coatings
Maximum Output	11.3 kg/min (25 lb/min)	22.7 kg/min (50 lb/min)
Minimum Output	<0.45 kg/min (< 1 lb/min)	1.4 kg/min (3 lb/min)
Maximum Fluid Working Pressure	240 bar (3500 psi, 24.0 MPa)	240 bar (3500 psi, 24.0 MPa)
Maximum Working Air Inlet Pressure	9 bar (130 psi, 0.9 MPa)	9 bar (130 psi, 0.9 MPa)
Maximum Fluid Temperature	94°C (200°F)	94°C (200°F)
Weight (with manifold)	1.2 kg (2.6 lb)	1.1 kg (3.1 lb)
Air inlet size	1/4 npt quick disconnect nipple	1/4 npt quick disconnect nipple
A Component (ISO) inlet size	-5 JIC; 1/2-20 UNF swivel	-5 JIC; 1/2-20 UNF swivel
B Component (Resin) inlet size	-6 JIC; 9/16-18 UNF swivel	-6 JIC; 9/16-18 UNF swivel
Wetted Parts	Aluminium, stainless steel, plated carbon steel, carbide, chemically resistant O-rings	Aluminium, stainless steel, plated carbon steel, carbide, chemically resistant O-rings
Gun Dimensions	19.1 x 20.6 x 8.4 cm (7.5 x 8.1 x 3.3 in)	19 x 20.6 x 8.4 cm (7.5 x 8.1 x 3.3 in)
Instruction manual	312666	309550
Applications	Residential foam insulation, roofing, other polyurethane foams and polyurea	Residential foam insulation, roofing, concrete, waterproofing and other polyurethane foams and elastomeric coatings





P2		MECHANICAL-PURGE FUSION MP	
	Foam and coatings		Foam and coatings
	18 kg/min (40 lb/min)		22.7 kg/min (50 lb/min)
	1.4 kg/min (3 lb/min)		0.9 kg/min (2 lb/min)
	221 bar (3200 psi, 22.1 MPa)		240 bar (3500 psi, 24.0 MPa)
	7.6 bar (110 psi, 0.76 MPa)		9 bar (130 psi, 0.9 MPa)
	93°C (200°F)		94°C (200°F)
	1.4 kg (3.0 lb)		1.3 kg (3.4 lb)
	1/4 npt		1/4 npt quick disconnect nipple
	-5 JIC; 1/2-20 UNF swivel		-5 JIC; 1/2-20 UNF swivel
	-6 JIC; 9/16-18 UNF swivel		-6 JIC; 9/16-18 UNF swivel
	Aluminium, stainless steel, plated carbon steel, brass, carbide, fluorocarbon O-rings		Aluminium, stainless steel, plated carbon steel, brass, polycarbonyl, chemically resistant O-rings, UHMWPE, Ceram Tip
	17.5 x 22 x 8.9 cm (6.9 x 8.7 x 3.5 in)		19.3 x 20.6 x 7.9 cm (7.6 x 8.1 x 3.1 in)
	313213		309856
	Residential foam insulation, roofing, concrete, waterproofing and other polyurethane foams and elastomeric coatings		Residential foam insulation, roofing, concrete, waterproofing and other polyurethane foams and elastomeric coatings

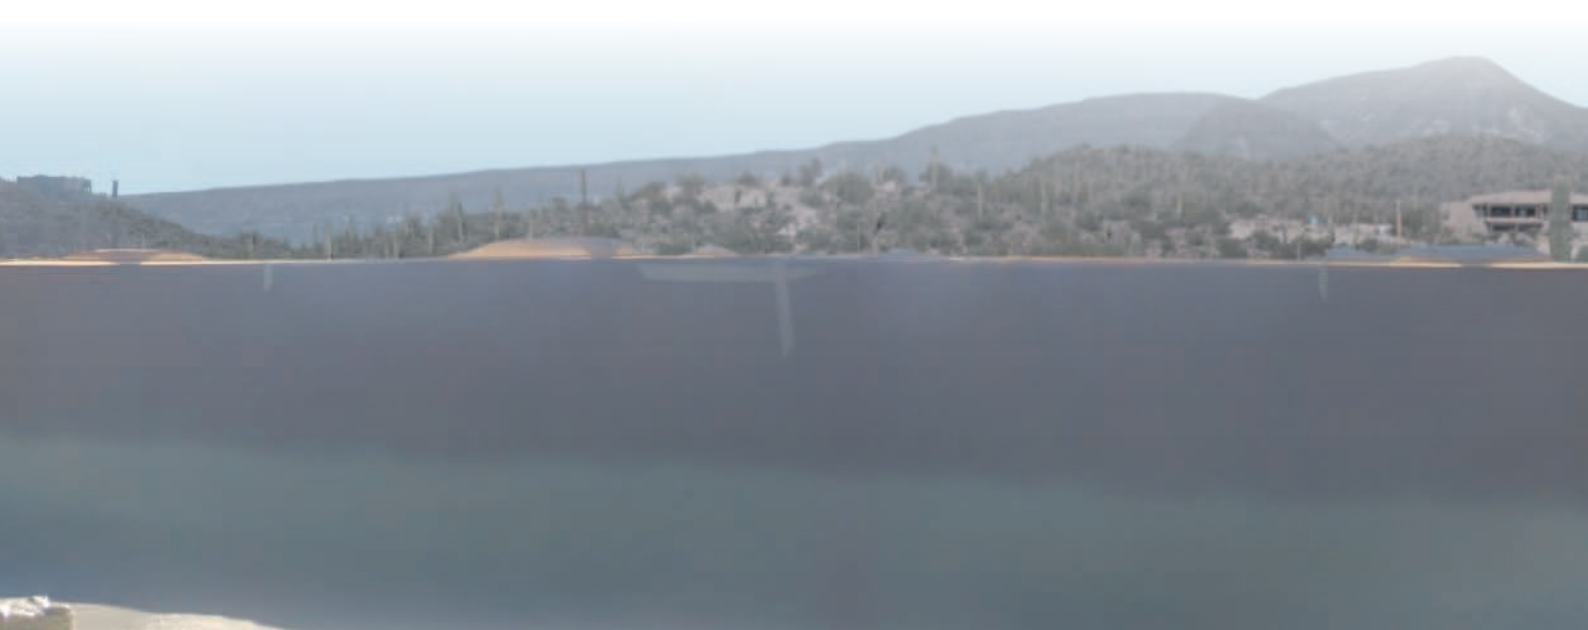

Gun Accessories

Choosing the correct mix chambers, modules and tips

Choosing the right tips and mix chambers

1. Choose a Round or Flat pattern for your tip or mix chamber
(typically round for foam and flat for coatings)
2. Specify "A" and "B" size for your orifice or chamber
3. Specify the desired tip size for your application

LEGEND

Fusion CS:

- RD = Round Mix Chamber
- WD = Wide Mix Chamber
- FL = Flat Mix Chamber
- FT = Flat Tip

Fusion AP:

- AR = Air (purge) Round Mix Chamber
- AF = Air (purge) Flat Mix Chamber
- AW = Air Wide Round Mix Chamber
- FT = Flat Tip (air-purge)

Fusion MP:

- MR = Mechanical (purge) Round
- XR = Direct Impinge Round
- RTM = Round Tip Mechanical (purge)
- MF = Mechanical (Purge) Flat
- XF = Direct Impinge Flat
- FTM = Flat Tip Mechanical (purge)

CHAMBER/ORIFICE CONVERSION

Use this conversion chart to convert the Chamber size to the Orifice size.

Chamber Size	Orifice Size
000	.020
00	.029
01	.042
02	.052
03	.060
04	.070
05	.086

Gun	Mix Chamber/Tip	Pattern at 61 cm (24 in) from target	Polyurea in liter/min (gpm) @ 138 bar (2000 psi)	Foam in kg/min (lb/min) @ 1000 psi
Fusion CS Round		x in (x mm)	x liter/min (x gpm)	x kg/min (x lb/min)
CS20RD	RD2020	127 mm (5 in)	1,9 (0,5)	1,5 (3)
CS00RD	RD0000	203 mm (8 in)	4,1 (1,1)	3,1 (7)
CS01RD	RD0101	279 mm (11 in)	6,1 (1,6)	4,1 (9)
CS02RD	RD0202	305 mm (12 in)	9,1 (2,4)	6,4 (14)
CS03RD	RD0303	356 mm (14 in)	NA	14,1 (9)
Fusion CS Wide Round				
CS22WD	WD2222	203 mm (8 in)	1,9 (0,5)	2,1 (4,5)
CS00WD	WD0000	381 mm (15 in)	4,1 (1,1)	3,1 (7)
CS01WD	WD0101	406 mm (16 in)	6,1 (1,6)	4,1 (9)
CS02WD	WD0202	457 mm (18 in)	9,1 (2,4)	6,4 (14)
CS03WD	WD0303	457 mm (18 in)	NA	14,1 (9)
Fusion CS Flat				
CS20F1	FL2020 w/FT0424	254 mm (10 in)	1,9 (0,5)	1,5 (3)
CS20F2	FL2020 w/FT0438	254 mm (10 in)	2,2 (0,6)	1,5 (3)
CS00F1	FL0000 w/FT0424	254 mm (10 in)	3,7 (1,0)	2,7 (6)
CS00F2	FL0000 w/FT0438	254 mm (10 in)	4,5 (1,2)	3,1 (7)
CS00F3	FL0000 w/FT0624	356 mm (14 in)	3,7 (1,0)	2,7 (6)
CS00F4	FL0000 w/FT0638	356 mm (14 in)	4,5 (1,2)	3,1 (7)
CS00F5	FL0000 w/FT0838	457 mm (18 in)	4,5 (1,2)	3,1 (7)
CS00F6	FL0000 w/FT0848	457 mm (18 in)	4,5 (1,2)	3,1 (7)
CS01F1	FL0101 w/FT0424	254 mm (10 in)	3,7 (1,0)	2,7 (6)
CS01F2	FL0101 w/FT0438	254 mm (10 in)	4,9 (1,3)	4,1 (9)
CS01F3	FL0101 w/FT0624	356 mm (14 in)	3,7 (1,0)	2,7 (6)
CS01F4	FL0101 w/FT0638	356 mm (14 in)	4,9 (1,3)	4,1 (9)
CS01F5	FL0101 w/FT0838	457 mm (18 in)	4,9 (1,3)	4,1 (9)
CS01F6	FL0101 w/FT0848	457 mm (18 in)	4,9 (1,3)	4,1 (9)
CS02F1	FL0202 w/FT0424	254 mm (10 in)	3,7 (1,0)	2,7 (6)
CS02F2	FL0202 w/FT0438	254 mm (10 in)	4,9 (1,3)	4,1 (9)
CS02F3	FL0202 w/FT0624	356 mm (14 in)	3,7 (1,0)	2,7 (6)
CS02F4	FL0202 w/FT0638	356 mm (14 in)	4,9 (1,3)	4,1 (9)
CS02F5	FL0202 w/FT0838	457 mm (18 in)	4,9 (1,3)	4,1 (9)
CS02F6	FL0202 w/FT0848	457 mm (18 in)	4,9 (1,8)	5,4 (12)
Fusion Air-Purge Round				
246099	AR2020	127 mm (5 in)	1,9 (0,5)	1,5 (3)
246100	AR2929	203 mm (8 in)	4,1 (1,1)	3,1 (7)
248617	AR3737	227 mm (9 in)	4,9 (1,3)	3,6 (8)
246101	AR4242	279 mm (11 in)	6,1 (1,6)	4,1 (9)
246102	AR5252	305 mm (12 in)	9,1 (2,4)	6,4 (14)
246103	AR6060	356 mm (14 in)	NA	14,1 (9)
246104	AR7070	381 mm (15 in)	NA	11,3 (25)
246105	AR8686	457 mm (18 in)	NA	15,8 (35)
Fusion Air-Purge Wide Round				
24D581	AW2828	381 mm (15 in)	4,1 (1,1)	3,1 (7)
NA	AW3333	381 mm (15 in)	4,9 (1,3)	3,6 (8)
249529	AW3939	406 mm (16 in)	6,1 (1,6)	4,1 (9)
249530	AW4646	457 mm (18 in)	9,1 (2,4)	6,4 (14)
NA	AW5757	457 mm (18 in)	NA	14,1 (9)
NA	AW6464	564 mm (22 in)	NA	11,3 (25)
NA	AW8282	610 mm (24 in)	NA	15,8 (35)

Gun	Mix Chamber/Tip	Pattern at 61 cm (24 in) from target	Polyurea in liter/min (gpm) @ 138 bar (2000 psi)	Foam in kg/min (lb/min) @ 1000 psi
Fusion Air-Purge Flat				
247101	AF2020 (FT0424)	254 mm (10 in)	2,2 (0,6)	1,5 (3)
247112	AF2929 (FT0438)	254 mm (10 in)	4,5 (1,2)	3,1 (7)
247124	AF4242 (FT0638)	356 mm (14 in)	4,9 (1,3)	4,1 (9)
247138	AF5252 (FT0848)	457 mm (18 in)	6,8 (1,8)	5,4 (12)
Fusion Mechanical-Purge Round				
247003	XR2323 (RTM030)	152 mm (6 in)	1,9 (0,5)	1,8 (4)
247007	XR2929 (RTM040)	203 mm (8 in)	3,4 (0,9)	3,1 (7)
247212 / 247012	MR3535 / XR3535 (RTM040)	203 mm (8 in)	4,5 (1,2)	3,6 (8)
247219 / 247019	MR4747 / XR4747 (RTM055)	227 mm (9 in)	6,4 (1,7)	4,5 (10)
247226 / 247026	MR5757 / XR5757 (RTM070)	254 mm (10 in)	10,2 (2,7)	6,8 (15)
247232	MR6666 (RTM080)	279 mm (11 in)	NA	21,8 (4)
247239	MR8282 (RTM090)	305 mm (12 in)	NA	13,6 (30)
247246	MR9494 (RTM110)	305 mm (12 in)	NA	34,1 (9)
Fusion Mechanical-Purge Flat				
247051	XF1313 (FTM424)	254 mm (10 in)	0,6 (0,15)	0,7 (1,5)
247258 / 247058	MF1818 / XF1818 (FTM424)	254 mm (10 in)	1,2 (0,3)	0,9 (2)
247061	XF 2323 (FTM424)	254 mm (10 in)	1,5 (0,4)	1,1 (2,5)
247265 / 247065	MF2929 / XF2929 (FTM424)	254 mm (10 in)	2,2 (0,6)	1,5 (3)
247275 / 247075	MF3535 / XF3535 (FTM638)	356 mm (14 in)	3,4 (0,9)	2,7 (6)
247282 / 247082	MF4747 / XF4747 (FTM638)	356 mm (14 in)	4,1 (1,1)	3,1 (7)
247289 / 247089	MF5757 / XF5757 (FTM638)	356 mm (14 in)	4,9 (1,3)	3,6 (8)
P2 Gun				
GCP2RA	GC250A w/GC251A	127 mm (5 in)	1,5 (0,4)	1,5 (3)
GCP2R0	GC2500 w/GC2510	229 mm (9 in)	4,1 (1,1)	3,6 (8)
GCP2R1	GC2501 w/GC2511	254 mm (10 in)	6,1 (1,6)	5,4 (12)
GCP2R2	GC2502 w/ GC2512	305 mm (12 in)	9,4 (2,5)	12,7 (6)
GCP2R3	GC2503 w/ GC2513	356 mm (14 in)	NA	21,8 (4)
GCP2R4	GC2504 w/ GC2514	394 mm (15.5 in)	NA	24,1 (9)
GCP2R5	GC2505 w/ GC2515	457 mm (18 in)	NA	32,7 (6)
P2 Elite Gun				
GCP3RA	GC250A w/GC251A	127 mm (5 in)	1,5 (0,4)	1,5 (3)
GCP3R0	GC2500 w/GC2510	229 mm (9 in)	4,1 (1,1)	3,6 (8)
GCP3R1	GC2501 w/GC2511	254 mm (10 in)	6,1 (1,6)	5,4 (12)
GCP3R2	GC2502 w/ GC2512	305 mm (12 in)	9,4 (2,5)	12,7 (6)
GCP3R3	GC2503 w/ GC2513	356 mm (14 in)	NA	21,8 (4)
GCP3R4	GC2504 w/ GC2514	394 mm (15.5 in)	NA	24,1 (9)
GCP3R5	GC2505 w/ GC2515	457 mm (18 in)	NA	32,7 (6)
P2 Auto Gun				
GCP4RA	GC250A w/GC251A	127 mm (5 in)	1,5 (0,4)	1,5 (3)
GCP4R0	GC2500 w/GC2510	229 mm (9 in)	4,1 (1,1)	3,6 (8)
GCP4R1	GC2501 w/GC2511	254 mm (10 in)	6,1 (1,6)	5,4 (12)
GCP4R2	GC2502 w/ GC2512	305 mm (12 in)	9,4 (2,5)	12,7 (6)
GCP4R3	GC2503 w/ GC2513	356 mm (14 in)	NA	21,8 (4)
GCP4R4	GC2504 w/ GC2514	394 mm (15.5 in)	NA	24,1 (9)
GCP4R5	GC2505 w/ GC2515	457 mm (18 in)	NA	32,7 (6)

PART NUMBER EXAMPLES

FT0438

Fusion CS or Fusion AP Flat Tip
 Fan Pattern Width = 8 in (203 mm) (double this number)
 Tip Orifice Size = .038 in (0,96 mm)



RD0202

Fusion CS Round Mix Chamber
 First 02 = "A" (ISO) Chamber Size
 Second 02 = "B" (RES) Chamber Size



AF4242

Fusion AP Flat Mix Chamber
 First 42 = "A" (ISO) Orifice Size = .042 in (1,6 mm)
 Second 42 = "B" (RES) Orifice Size = .042 in (1,6 mm)



FTM424

Fusion MP Flat Tip Mechanical
 Fan Pattern Width = 8 in (203 mm) (double this number)
 Tip Orifice Size = .024 in (0,61 mm)



RTM030

Fusion MP Round Tip Mechanical
 Tip Orifice Size = .030 in (0,76 mm)



MR 3535

Fusion MP Mechanical Round Mix Module
 First 35 = "A" (ISO) Orifice Size = .035 in (0,89 mm)
 Second 35 = "B" (RES) Orifice Size = .035 in (0,89 mm)



Ordering Information



PROPORTIONER ACCESSORIES

- 15B593 Membrane switch shield
- 15B742 Wire harness extension for display, 15m (50 ft)
- 248921 Heated hose controller, 350 watt, allows Reactor heated hose extended past 91m (300 ft). Requires 200-230 volts at 15 amps
- 15F028 Band heater, 1000 watt, for 208l (55 gal) drum, 230 volt
- 206995 TSL, 0.95l (1 qt)
- 206996 TSL, 3.8l (1 gal)
- 246085 Data reporting kit
- 247827 Heater control module
- 247828 A, B hose heater power module
- 247838 Modular heater control to retrofit electric/hydraulic units
- 249634 Cold spray kit – includes Ultra-Lite gun and restrictor valve. For Reactor E-10 models only.
- 249635 Joint fill kit – includes Ultra-Lite gun and extension tip. For Reactor E-10 models only.
- 255148 Circulation valve kit – includes ISO and resin circulation valves
- 255149 Circulation valve – ISO only
- 255150 Circulation valve – resin only
- 248122 Reactor conversion kit 1-ph to 3-ph, 230V
- 248123 Reactor conversion kit 3-ph to 1-ph, 230V
- GC1845 ISO Pump Lube System kit
- 261669 Fluid temperature sensor



HEATED HOSES

HOSES, 2000 PSI (138 BAR, 13.8 MPA)

- 246045 6.3 mm x 15 m (1/4 in x 50 ft)
- 246046 9.5 mm x 15 m (3/8 in x 50 ft)
- 246047 12.7 mm x 15 m (1/2 in x 50 ft)
- 246048 6.3 mm x 7.6 m (1/4 in x 25 ft)
- 246049 9.5 mm x 7.6 m (3/8 in x 25 ft)
- 246074 6.3 mm x 15 m (1/4 in x 50 ft) no thermocouple wire
- 246075 9.5 mm x 15 m (3/8 in x 50 ft), no thermocouple wire
- 246076 12.7 mm x 15 m (1/2 in x 50 ft), no thermocouple wire
- 246678 9.5 mm x 15 m (3/8 in x 50 ft), with Scuffguard™
- 246050 Whip hose: 6.3 mm x 3 m (1/4 in x 10 ft) with Scuffguard
- 249586 Whip hose: 6.3 mm x 91 cm (1/4 in x 3 ft) with Scuffguard
- 255089 6.3 mm x 9.5 mm x 15 m (1/4 in x 3/8 in x 50 ft) with Scuffguard
- 256407 Unheated whip hose, 1.8m (6 ft)
- 256549 9.5 mm x 15 m (3/8 in x 50 ft) no thermocouple wire, with Scuffguard

HOSES, 3500 PSI (240 BAR, 24.0 MPA)

- 246052 6.3 mm x 15 m (1/4 in x 50 ft)
- 246053 9.5 mm x 15 m (3/8 in x 50 ft)
- 246054 12.7 mm x 15 m (1/2 in x 50 ft)
- 246679 9.5 mm x 15 m (3/8 in x 50 ft), with Scuffguard
- 246055 Whip hose: 6.3 mm x 3 m (1/4 in x 10 ft), with Scuffguard
- 246056 Whip hose: 9.5 mm x 3 m (3/8 in x 10 ft), with Scuffguard
- 249588 9.5 mm x 15 m (3/8 in x 50 ft) no thermocouple wire
- 256548 12.7 mm x 15 m (1/2 in x 50 ft) with Scuffguard
- 261335 12.7 mm x 15 m (1/2 in x 50 ft) no thermocouple wire
- 247164 6.3 mm x 9.5 mm x 15 m (1/4 in x 3/8 in x 50 ft) with Scuffguard
- 261336 9.5 mm x 12.7 mm x 15 m (3/8 in x 1/2 in x 50 ft)
- 256626 Unheated whip hose, 1.8m (6 ft)

HOSE ACCESSORIES

- 246077 3m (10 ft) braided polyester mesh Scuffguard
- 246078 15m (50 ft) braided polyester mesh Scuffguard
- 246456 15m (50 ft) polyethylene Scuffguard
- 246805 7.6m (25 ft) braided polyester mesh Scuffguard
- 24J523 15m (50 ft) Fluid Temperature Sensor (FTS) cable
- 24J524 7.6m (25 ft) Fluid Temperature Sensor (FTS) cable
- 261669 Fluid temperature sensor
- 261821 Power-lock™ splice kit
- 15M312 Power-lock splice kit (20-pk) (enough for 10 hoses)



SUPPLY PUMPS AND AGITATORS

COMPLETE SUPPLY PUMP SYSTEMS

(Includes the following: All air and fluid fittings, hoses for two pumps.)

- 247955..... Complete T1 (247956) supply pump system
- 246081..... Complete T2 (246898) supply pump system
- 246655..... Complete Triton™ 308 (246677) supply pump system
- 246369..... Complete Husky™ 515 (246481) supply pump system
- 246375..... Complete Husky™ 716 (246482) supply pump system
- 246376..... Complete Husky™ 1050 (246676) supply pump system

SUPPLY PUMPS WITH DRUM RISER TUBE

- 256200..... T1 2:1 ratio piston pump for higher viscosity materials, 25 bar (360 psi) max fluid pressure, 9,5 liter (2.5 gpm) @ 100 cpm
- 295616..... T2 2:1 ratio piston pump for higher viscosity materials, 28 bar (405 psi) max fluid pressure, 24 liter (5.0 gpm) @ 100 cpm
- 246654..... Triton 308 diaphragm pump, aluminium, 3/8 in fluid outlet, 8 bar (115 psi) max air inlet, 7,6 liter (2.0 gpm) @ 60 cpm
- 246366..... Husky 515 diaphragm pump, acetal bolted design, 6,8 bar (100 psi) max air inlet, 28 liter (7.5 gpm) @ 60 cpm
- 246367..... Husky 716 diaphragm pump, aluminium clamped design, 6,8 bar (100 psi) max air inlet, 28 liter (7.5 gpm) @ 60 cpm
- 246368..... Husky 1050 diaphragm pump for trailer mounts – aluminium, bolted, wall mount, 8,6 bar (125 psi) max air inlet, 34 liter (9 gpm) @ 60 cpm
- 248825..... 5:1 Monark™ drum pump, for high viscosity materials, 900 psi max fluid psi, 3m(10 ft) hose, 3/4 npt (m), air regulator, manual 310863

TWO SUPPLY PUMPS WITH FLUID PLUMBING

- 247956..... T1 pumps with supply hoses
- 246898..... T2 pumps with supply hoses
- 246677..... Triton 308 (246654), 3m x 19mm (10 ft x 3/4 in) supply hose
- 246481..... Husky 515 (246366), 3m x 19mm (10 ft x 3/4 in) supply hose
- 246482..... Husky 716 (246367), 3m x 19mm (10 ft x 3/4 in) supply hose
- 246676..... Husky 1050 (246368), 3m x 19mm (10 ft x 3/4 in) supply hose, 1.8m x 19mm (6 ft x 3/4 in) suction hose

SUPPLY PUMP ACCESSORIES

- 246419..... 208l (55 gal) feed pump tube with inlet ball check
- 246477..... 19mm (3/4 in (19 mm) bung return tube with air dryer port
- 246483..... Air distribution kit, 8.4 bar (120 psi, 0.84 MPa) for two feed pumps and a Fusion gun
- 247616..... Desiccant dryer kit
- 246978..... Reactor manifold circulation kit with return tubes, return fluid lines and dryers
- 15C381 Desiccant replacement

AGITATORS

- 224854..... Twistork CS, air-operated, 1-1/2 HP, 0.9m (37.3 in) length
- 235534..... Twistork SST, air-operated, 1-1/2 HP, 0.9m (37.3 in) length
- 236629..... Twistork SST, air-operated with built-in return tube, 3/4 HP, 1.2m (47.5 in) in length
- 248824..... Twistork CS, air-operated (224854), 1-1/2 HP, 0.9m (37.3 in) with air hose
- 24C728 Expanding blade mixer, low viscosity, up to 1000 centipoise
- 24C729 Expanding blade mixer, high-viscosity, up to 2000 centipoise

Ordering Information



LIQUID PURGE GUNS

FUSION CS GUN, ROUND

CS20RD RD2020 (000) round mix chamber (.020 orifice size)
CS00RD RD0000 (00) round mix chamber (.029 orifice size)
CS01RD RD0101 (01) round mix chamber (.042 orifice size)
CS02RD RD0202 (02) round mix chamber (.052 orifice size)
CS03RD RD0303 (03) round mix chamber (.060 orifice size)

FUSION CS GUN, WIDE ROUND

CS22WD WD2222 wide mix chamber (.022 orifice size)
CS00WD WD0000 wide mix chamber (.028 orifice size)
CS01WD WD0101 wide mix chamber (.039 orifice size)
CS02WD WD0202 wide mix chamber (.046 orifice size)
CS03WD WD0303 wide mix chamber (.057 orifice size)

FUSION CS GUN, FLAT

CS20F1 FL2020 mix chamber with FT0424 flat tip (0,61 orifice size)
CS20F2 FL2020 mix chamber with FT0438 flat tip (0,97 orifice size)
CS00F1 FL0000 mix chamber with FT0424 flat tip (0,61 orifice size)
CS00F2 FL0000 mix chamber with FT0438 flat tip (0,97 orifice size)
CS00F3 FL0000 mix chamber with FT0624 flat tip (0,61 orifice size)
CS00F4 FL0000 mix chamber with FT0638 flat tip (0,97 orifice size)
CS00F5 FL0000 mix chamber with FT0838 flat tip (0,97 orifice size)
CS00F6 FL0000 mix chamber with FT0848 flat tip (1,22 orifice size)
CS01F1 FL0101 mix chamber with FT0424 flat tip (0,61 orifice size)
CS01F2 FL0101 mix chamber with FT0438 flat tip (0,97 orifice size)
CS01F3 FL0101 mix chamber with FT0624 flat tip (0,61 orifice size)
CS01F4 FL0101 mix chamber with FT0638 flat tip (0,97 orifice size)
CS01F5 FL0101 mix chamber with FT0838 flat tip (0,97 orifice size)
CS01F6 FL0101 mix chamber with FT0848 flat tip (1,22 orifice size)
CS02F1 FL0202 mix chamber with FT0424 flat tip (0,61 orifice size)
CS02F2 FL0202 mix chamber with FT0438 flat tip (0,97 orifice size)
CS02F3 FL0202 mix chamber with FT0624 flat tip (0,61 orifice size)
CS02F4 FL0202 mix chamber with FT0638 flat tip (0,97 orifice size)
CS02F5 FL0202 mix chamber with FT0838 flat tip (0,97 orifice size)
CS02F6 FL0202 mix chamber with FT0848 flat tip (1,22 orifice size)

FUSION CS PARTS AND ACCESSORIES

256385 ClearShot Liquid Cartridges - pack of 25
256386 ClearShot Liquid Cartridges - pack of 50
256387 ClearShot Liquid Cartridges - pack of 100
117773 Fusion grease (248280 - pack of 10)
118665 Fusion lube (248279 - pack of 10)
246357 Gun filter, 40 mesh - pack of 10
246358 Gun filter, 60 mesh - pack of 10
246359 Gun filter, 80 mesh - pack of 10
248132 Fluid housing O-ring, large - pack of 6
248648 Fluid housing O-ring, mix chamber - pack of 6
256414 Cover retainer kit - pack of 5
256415 Front cover, round kit - pack of 5
256416 Front cover, tip kit - pack of 5
256454 Air piston kit
256455 Spool valve kit
256456 Variable flow kit
256457 Front end replacement kit
256459 A Side valve kit
256460 B Side valve kit

FUSION CS PARTS AND ACCESSORIES (continued)

256461 Fluid head checks kit
256462 Hose manifold checks kit
256463 Side seal housings kit
256464 Side seals kit
256466 Hose manifold kit
256465 Polycarballoy seals kit, pack of 2
256469 Hose manifold check O-rings kit
256470 Air piston O-ring kit
256471 Fluid head O-ring kit
256472 Back cap O-ring kit
256467 Side seal O-rings - pack of 6
256468 Side seal housing O-rings - pack of 6
256489 Polycarballoy seals kit, pack of 20
256490 Complete O-rings repair kit
256510 Fusion CS solvent flush kit
256526 Fusion CS gun clean out drill kit
256566 Fusion CS recirc manifold kit
256567 Tip retainer kit
256569 Fusion CS TP100 tip kit
256570 Fusion CS stud wall tip kit
256640 O-ring, fluid head checks kit - pack of 6
256641 Fusion CS flush manifold kit
258996 CS Adapter Block, used with AP hose manifold
256642 Inlet cover kit
256650 TP100 seals - pack of 5
256651 Stud wall tip seals - pack of 5
256771 Check valve O-ring, radial - pack of 6
256772 Air piston O-ring, small - pack of 6
256773 Fluid housing O-ring, small - pack of 6
256774 Variable flow O-ring - pack of 6
256775 Air piston O-ring, large - pack of 6
256923 Side seal springs - pack of 10
256977 Studwall retainer kit / TP 100
256978 Studwall housing kit / TP 100
257142 Polycarballoy side seal housing kit
257419 Check valve spring - pack of 10
257420 Check ball - pack of 10
257421 Check valve retainer - pack of 10
257422 Check valve kit, Fusion CS (ISO)
257423 Check valve kit, Fusion CS (resin)
257424 Dosing piston with O-rings
257426 Variable flow O-ring kit - pack of 6
257427 Check valve housing (ISO) - pack of 10
257428 Check valve housing (resin) - pack of 10

FUSION CS MIX CHAMBER KITS

(Includes clean-out tools)

FL2020 Fusion CS 2020 flat mix chamber kit
FL0000 Fusion CS 2929 flat mix chamber kit
FL0101 Fusion CS 4242 flat mix chamber kit
FL0202 Fusion CS 5252 flat mix chamber kit
RD2020 Fusion CS 2020 round mix chamber kit
RD0000 Fusion CS 2929 round mix chamber kit
RD0101 Fusion CS 4242 round mix chamber kit
RD0202 Fusion CS 5252 round mix chamber kit
RD0303 Fusion CS 6060 round mix chamber kit
WD2222 Fusion CS 2222 wide mix chamber kit
WD0000 Fusion CS 2828 wide mix chamber kit
WD0101 Fusion CS 3939 wide mix chamber kit
WD0202 Fusion CS 4646 wide mix chamber kit
WD0303 Fusion CS 5757 wide mix chamber kit



AIR-PURGE GUNS

FUSION AIR-PURGE GUNS, ROUND

246099..... AR2020 (000) mix chamber (0.020 orifice size)
246100..... AR2929 (00) mix chamber (0.029 orifice size)
246101..... AR4242 (01) mix chamber (0.042 orifice size)
246102..... AR5252 (02) mix chamber (0.052 orifice size)
246103..... AR6060 (03) mix chamber (0.060 orifice size)
246104..... AR7070 (04) mix chamber (0.070 orifice size)
246105..... AR8686 (05) mix chamber (0.086 orifice size)
248617..... Gun Fusion AP AR3737
24D581 AW2828 (00) wide round pattern
249529..... AW3939 (01) wide round pattern
249530..... AW4646 (02) wide round pattern
248408..... Adhesive/spatter gun for fleeceback roofing systems AR7070
249525..... Stud wall gun w/AF4242 and FTM979
249526..... Stud wall gun w/AF5252 and FTM979

FUSION AIR-PURGE MIX CHAMBERS, ROUND

(Includes clean-out tools)

AR2020 (000) mix chamber (0.020 orifice size)
AR2929 (00) mix chamber (0.029 orifice size)
AR3737 Mix chamber with (between 0.029 and 0.042 orifice size)
AR4242 (01) mix chamber (0.042 orifice size)
AR5252 (02) mix chamber (0.052 orifice size)
AR6060 (03) mix chamber (0.060 orifice size)
AR7070 (04) mix chamber (0.070 orifice size)
AR8686 (05) mix chamber (0.086 orifice size)

FUSION AIR-PURGE MIX CHAMBERS, WIDE ROUND

(Includes clean-out tools)

AW2222..... 50% wider pattern, compares to AR2020
AW2828..... 50% wider pattern, compares to AR2929
AW3333..... 50% wider pattern, compares to AR3737
AW3939..... 50% wider pattern, compares to AR4242
AW4646..... 50% wider pattern, compares to AR5252
AW5757..... 50% wider pattern, compares to AR6060
AW6464..... 50% wider pattern, compares to AR7070
AW8282..... 50% wider pattern, compares to AR8686

FUSION AIR-PURGE GUN, FLAT

247101..... AF2020 mix chamber with FT0424 flat tip
247102..... AF2020 mix chamber with FT0438 flat tip
247103..... AF2020 mix chamber with FT0624 flat tip
247104..... AF2020 mix chamber with FT0638 flat tip
247107..... AF2020 mix chamber with FT0838 flat tip
247108..... AF2020 mix chamber with FT0848 flat tip
247111..... AF2929 mix chamber with FT0424 flat tip
247112..... AF2929 mix chamber with FT0438 flat tip
247113..... AF2929 mix chamber with FT0624 flat tip
247114..... AF2929 mix chamber with FT0638 flat tip
247117..... AF2929 mix chamber with FT0838 flat tip
247118..... AF2929 mix chamber with FT0848 flat tip
247121..... AF4242 mix chamber with FT0424 flat tip
247122..... AF4242 mix chamber with FT0438 flat tip
247123..... AF4242 mix chamber with FT0624 flat tip
247124..... AF4242 mix chamber with FT0638 flat tip
247127..... AF4242 mix chamber with FT0838 flat tip
247128..... AF4242 mix chamber with FT0848 flat tip
247131..... AF5252 mix chamber with FT0424 flat tip
247132..... AF5252 mix chamber with FT0438 flat tip
247133..... AF5252 mix chamber with FT0624 flat tip
247134..... AF5252 mix chamber with FT0638 flat tip
247137..... AF5252 mix chamber with FT0838 flat tip
247138..... AF5252 mix chamber with FT0848 flat tip

FUSION AIR-PURGE MIX CHAMBERS, FLAT

(Includes clean-out tool and O-ring)

AF2020..... (000) mix chamber
AF2033..... Off-ratio mix chamber
AF2929..... (00) mix chamber
AF2942..... Off-ratio mix chamber
AF4242..... (01) mix chamber
AF5252..... (02) mix chamber

FUSION AIR-PURGE TIPS, FLAT

FT0424..... Low fluid flow, 200 to 250mm (8 to 10 in) tip pattern
FT0438..... Medium fluid flow, 200 to 250mm (8 to 10 in) pattern
FT0624..... Low fluid flow, 300 to 350mm (12 to 14 in) tip pattern
FT0638..... Medium fluid flow, 300 to 350mm (12 to 14 in) tip pattern
FT0838..... Medium fluid flow, 400 to 450mm (16 to 18 in) pattern
FT0848..... High fluid flow, 400 to 450mm (16 to 18 in) pattern

FUSION AIR-PURGE WITH POLYCARBALLOY OPTIONS

255201..... AP Fusion w/ PolyCarballoy side seal - AR4242(01) mix chamber
255202..... AP Fusion w/ PolyCarballoy side seal - AR5252(02) mix chamber
249990..... PolyCarballoy side seals, pack of 2
277298..... PolyCarballoy side seals, pack of 50

FUSION AIR-PURGE PARTS AND ACCESSORIES

15B772 3.18 mm (1/8 in) air hose, 0.46m (18 in) long,
use to attach gun to whip hose
15D234 Flat tip clean-out tool
15B210 Air cap, round pattern, for Fusion Air-Purge Gun
15B801 Air cap, flat pattern, for Fusion Air-Purge Gun
15B565 Ball valve
15B817 Gun flush manifold block
15D546 Fusion gun cleaning kit
117509..... 1/4 npt male quick disconnect, air
117510..... 1/4 npt female quick disconnect, air
117661..... Pin vise, double-ended pin vise, with reversible chucks
117773..... Fusion grease, 3 oz cartridge (248280 – pack of 10)
117792..... Fusion grease gun
118665..... Fusion lube, 4 oz tube (248279 – pack of 10)
119386..... Drill bit kit, 20 piece, #61 - #81
244914..... Air-Purge gun cover kit, pack of 10
246012..... Fluid manifold assembly
246347..... Side seal O-ring kit, includes (6) O-rings for both cartridges
246348..... Side seal kit, includes (2) side seals with O-rings
246349..... A (ISO) cartridge assembly, A-side, SST, seal and O-rings
246350..... B (Poly) cartridge assembly, B-side, SST, seal and O-rings
246351..... Check valve seal repair kit
246352..... Check valve assembly, B (Poly)
246354..... O-ring, clean off air, pack of 6
246355..... Gun seal repair kit, includes all necessary O-rings for the entire
gun assembly
246356..... Fluid manifold valve repair kit
246357..... Gun filter, 40 mesh, pack of 10
246358..... Gun filter, 60 mesh, pack of 10
246359..... Gun filter, 80 mesh, pack of 10
246360..... Flat tip sealing O-ring kit, pack of 3
246361..... Quick change front half spray head kit, includes entire spray
head assembly less mix chamber. Order mix chamber separately.
246731..... Check valve assembly, A (ISO)
246944..... Manifold conversion kit; converts Fusion manifold to fit a GX-7
gun. Fusion manifold 246012 not included.
246945..... Manifold conversion kit; converts GX-7 manifold to fit a fusion
gun

Ordering Information



AIR-PURGE GUNS *Continued*

- 248129..... Check valve O-ring, radial, pack of 6
- 248130..... Side seal housing O-ring kit, pack of 6
- 248132..... O-ring, fluid housing, pack of 6
- 248133..... Check valve O-ring, face, pack of 6
- 248139..... Solvent flush kit, 1 qt (.95 l) pressurized container for solvent flushing gun before service
- 248229..... 5 gal Fusion Gun flush system
- 248279..... Fusion lube for lubricating threads, O-rings, components, pack of 10
- 248280..... Fusion grease, pack of 10
- 248414..... Adhesive/spatter kit, converts Fusion Air-Purge to adhesive/spatter gun
- 248415..... Tip for adhesive/spatter gun
- 248528..... Fusion Air-Purge pour adapter kit

FUSION AIR-PURGE EXTENSION TIP KITS

- 248010..... Extension tip kit for AR2020/AF2929 mix chamber
- 248011..... Extension tip kit for AR2929/AF2929 mix chamber
- 248012..... Extension tip kit for AR4242/AF4242 mix chamber
- 248013..... Extension tip kit for AR5252/AF5252 mix chamber
- 248014..... Extension tip kit for AR2020/AF2929 mix chamber
- 248015..... Extension tip kit for AR2929/AF2929 mix chamber
- 248016..... Extension tip kit for AR4242/AF4242 mix chamber
- 248017..... Extension tip kit for AR5252/AF5252 mix chamber
- 248020..... Extension tip air cap kit
- 248018..... Flat extension tip seal kit
- 248019..... Round extension tip seal kit
- 249421..... Fusion stud wall kit
- 24C358 Fusion TP 100 tip kit

P2 GUNS

- GCP2R0 Probler 2 Gun Assembly
- GCP2R1 Probler 2 Gun Assembly
- GCP2R2 Probler 2 Gun Assembly
- GCP2R3 Probler 2 Gun Assembly
- GCP2R4 Probler 2 Gun Assembly
- GCP2R5 Probler 2 Gun Assembly
- GCP2RA..... Probler 2 Gun Assembly

P2 ELITE GUNS

- GCP3R0 Probler P2 Elite Gun Assembly
- GCP3R1 Probler P2 Elite Gun Assembly
- GCP3R2 Probler P2 Elite Gun Assembly
- GCP3R3 Probler P2 Elite Gun Assembly
- GCP3R4 Probler P2 Elite Gun Assembly
- GCP3R5 Probler P2 Elite Gun Assembly
- GCP3RA..... Probler P2 Elite Gun Assembly

P2 AUTO GUNS

- GCP4R0 Probler 2 Automatic Gun
- GCP4R1 Probler 2 Automatic Gun
- GCP4R2 Probler 2 Automatic Gun
- GCP4R3 Probler 2 Automatic Gun
- GCP4R4 Probler 2 Automatic Gun
- GCP4R5 Probler 2 Automatic Gun
- GCP4RA..... Probler 2 Automatic Gun

P2 SPARE PARTS AND ACCESSORIES

- GC1892 P2 Elite conversion kit
- GC1937 P2 standard repair kit
- GC1938 P2 flat spray kit
- GC1946 Side seal kit
- GC1947 P2 00-03 gun hardware kit
- GC1948 P2 AA gun hardware kit
- GC1949 P2 04-05 gun hardware kit
- GC1950 Premium repair kit
- GC1952 P2 0.059 jet nozzle
- GC1953 P2 0.07 jet nozzle
- GC1954 P2 pour cap
- GC1955 P2 LP/HP static mixer adapter
- GC1956 P2 static mixer assembly (non-nucleated)
- GC1957 P2 400mm (16-in) stud wall spray tip
- GC1958 P2 600mm (24-in) stud wall spray tip
- GC1959 P2 delay plug
- GC2494 P2 seal kit
- GC2495 P2 seal housing kit
- GC2496 P2 40 mesh filter kit
- GC2497 P2 100 mesh filter kit
- GC2498 P2 side seal kit
- GC2499 P2 handle kit
- GC2500 P2 round 00 mix chamber kit
- GC2501 P2 round 01 mix chamber kit
- GC2502 P2 round 02 mix chamber kit
- GC2503 P2 round 03 mix chamber kit
- GC2504 P2 round 04 mix chamber kit
- GC2505 P2 round 05 mix chamber kit
- GC250A P2 round AA mix chamber kit
- GC2510 Mix chamber 00 insert kit
- GC2511 Mix chamber 01 insert kit
- GC2512 Mix chamber 02 insert kit
- GC2513 Mix chamber 03 insert kit
- GC2514 Mix chamber 04 insert kit
- GC2515 Mix chamber 05 insert kit
- GC251A Mix chamber AA insert kit
- 257988..... P2 Elite chopper attachment, B-410
- 257989..... P2 Elite chopper attachment, B-510



MECHANICAL-PURGE GUNS

FUSION MECHANICAL-PURGE GUNS, DI, FLAT

247050..... Fusion MP direct impingement, flat pattern XF1313, FTM317
247051..... Fusion MP direct impingement, flat pattern XF1313, FTM424
247057..... Fusion MP direct impingement, flat pattern XF1818, FTM317
247058..... Fusion MP direct impingement, flat pattern XF1818, FTM424
247061..... Fusion MP direct impingement, flat pattern XF2323, FTM424
247062..... Fusion MP direct impingement, flat pattern XF2323, FTM438
247063..... Fusion MP direct impingement, flat pattern XF2323, FTM624
247065..... Fusion MP direct impingement, flat pattern XF2929, FTM424
247066..... Fusion MP direct impingement, flat pattern XF2929, FTM438
247067..... Fusion MP direct impingement, flat pattern XF2929, FTM624
247073..... Fusion MP direct impingement, flat pattern XF3535, FTM438
247074..... Fusion MP direct impingement, flat pattern XF3535, FTM624
247075..... Fusion MP direct impingement, flat pattern XF3535, FTM638
247081..... Fusion MP direct impingement, flat pattern XF4747, FTM624
247082..... Fusion MP direct impingement, flat pattern XF4747, FTM638
247083..... Fusion MP direct impingement, flat pattern XF4747, FTM838
247089..... Fusion MP direct impingement, flat pattern XF5757, FTM638
247090..... Fusion MP direct impingement, flat pattern XF5757, FTM838
247091..... Fusion MP direct impingement, flat pattern XF5757, FTM848
247163..... Fusion MP direct impingement, flat pattern XF2332, FTM438

FUSION MECHANICAL-PURGE GUNS, STANDARD, FLAT

247257..... Fusion MP standard, flat pattern MF1818, FTM317
247258..... Fusion MP standard, flat pattern MF1818, FTM424
247265..... Fusion MP standard, flat pattern MF2929, FTM424
247266..... Fusion MP standard, flat pattern MF2929, FTM438
247267..... Fusion MP standard, flat pattern MF2929, FTM624
247273..... Fusion MP standard, flat pattern MF3535, FTM438
247274..... Fusion MP standard, flat pattern MF3535, FTM624
247275..... Fusion MP standard, flat pattern MF3535, FTM638
247281..... Fusion MP standard, flat pattern MF4747, FTM624
247282..... Fusion MP standard, flat pattern MF4747, FTM638
247283..... Fusion MP standard, flat pattern MF4747, FTM838
247289..... Fusion MP standard, flat pattern MF5757, FTM638
247290..... Fusion MP standard, flat pattern MF5757, FTM838
247291..... Fusion MP standard, flat pattern MF5757, FTM848

FUSION MECHANICAL-PURGE GUNS, DI, ROUND

247003..... Fusion MP direct impingement, round pattern XR2323, RTM040
247006..... Fusion MP direct impingement, round pattern XR2929, RTM030
247007..... Fusion MP direct impingement, round pattern XR2929, RTM040
247011..... Fusion MP direct impingement, round pattern XR3535, RTM030
247012..... Fusion MP direct impingement, round pattern XR3535, RTM040
247013..... Fusion MP direct impingement, round pattern XR3535, RTM055
247018..... Fusion MP direct impingement, round pattern XR4747, RTM040
247019..... Fusion MP direct impingement, round pattern XR4747, RTM055
247025..... Fusion MP direct impingement, round pattern XR5757, RTM055
247026..... Fusion MP direct impingement, round pattern XR5757, RTM070

Ordering Information



MECHANICAL-PURGE GUNS *Continued*

FUSION MECHANICAL-PURGE GUNS, STANDARD, ROUND

247211..... Fusion MP standard, round pattern MR3535, RTM030
247212..... Fusion MP standard, round pattern MR3535, RTM040
247213..... Fusion MP standard, round pattern MR3535, RTM055
247218..... Fusion MP standard, round pattern MR4747, RTM040
247219..... Fusion MP standard, round pattern MR4747, RTM055
247225..... Fusion MP standard, round pattern MR5757, RTM055
247226..... Fusion MP standard, round pattern MR5757, RTM070
247231..... Fusion MP standard, round pattern MR6666, RTM070
247232..... Fusion MP standard, round pattern MR6666, RTM080
247233..... Fusion MP standard, round pattern MR6666, RTM090
247239..... Fusion MP standard, round pattern MR8282, RTM090
247240..... Fusion MP standard, round pattern MR8282, RTM100
247245..... Fusion MP standard, round pattern MR9494, RTM100
247246..... Fusion MP standard, round pattern MR9494, RTM110

FUSION MECHANICAL-PURGE MIX MODULES

MF1818..... Standard mix module, flat
MF2929..... Standard mix module, flat
MF3535..... Standard mix module, flat
MF4747..... Standard mix module, flat
MF5757..... Standard mix module, flat
MR3535..... Standard mix module, round
MR4747..... Standard mix module, round
MR5757..... Standard mix module, round
MR6666..... Standard mix module, round
MR8282..... Standard mix module, round
MR9494..... Standard mix module, round
XF1313..... Direct impingement mix module, flat
XF1818..... Direct impingement mix module, flat
XF1824..... Direct impingement mix module, flat
XF2323..... Direct impingement mix module, flat
XF2332..... Direct impingement mix module, flat
XF2929..... Direct impingement mix module, flat
XF3535..... Direct impingement mix module, flat
XF4747..... Direct impingement mix module, flat
XF5757..... Direct impingement mix module, flat
XR2323..... Direct impingement mix module, flat
XR2929..... Direct impingement mix module, round
XR3535..... Direct impingement mix module, round
XR4747..... Direct impingement mix module, round
XR5757..... Direct impingement mix module, round

FUSION MECHANICAL-PURGE ROUND TIPS

RTM024..... Kit, round tip, mechanical-purge
RTM030..... Kit, round tip, mechanical-purge
RTM040..... Kit, round tip, mechanical-purge
RTM055..... Kit, round tip, mechanical-purge
RTM070..... Kit, round tip, mechanical-purge
RTM080..... Kit, round tip, mechanical-purge
RTM090..... Kit, round tip, mechanical-purge
RTM100..... Kit, round tip, mechanical-purge
RTM110..... Kit, round tip, mechanical-purge

FUSION MECHANICAL-PURGE FLAT TIPS

FTM317 Kit, flat tip, mechanical-purge, 152mm (6 in) pattern, very low flow
FTM424 Kit, flat tip, mechanical-purge, 203mm (8 in) pattern, low flow
FTM438 Kit, flat tip, mechanical-purge, 203mm (8 in) pattern, medium flow
FTM624 Kit, flat tip, mechanical-purge, 305mm (12 in) pattern, low flow
FTM638 Kit, flat tip, mechanical-purge, 305mm (12in) pattern, medium flow
FTM838 Kit, flat tip, mechanical-purge, 406mm (16 in) pattern, medium flow
FTM848 Kit, flat tip, mechanical-purge, 406mm (16 in) pattern, high flow

FUSION MECHANICAL-PURGE PARTS AND ACCESSORIES

244915 Mechanical-Purge gun cover kit, pack of 10
248603 Kit converts Fusion MP gun to Solvent-Purge
248642 Static mixer assembly for Solvent-Purge Gun, 76mm (3 in)
248682 Fusion Mechanical pour adapter kit
15D546 Fusion gun cleaning kit
119386 Drill bit kit, 20-piece, #61-#81
248000 Kit, complete O-ring, Fusion MP
248001 Kit, purge rod
248003 Kit, front/rear packing, pack of 4

FUSION SPECIALTY GUNS

248408 Fusion AP spatter/adhesive manual gun
248597 Manual Fusion solvent-purge gun

AUTOMATIC FUSION

(All Auto Fusion kits require 4-way solenoid valves)

115807 4-way solenoid valve, 24 volt DC
248376 Automatic Fusion AP, round, AR2929
248377 Automatic Fusion AP, round, AR4242
248378 Automatic Fusion AP, round, AR5252
248379 Automatic Fusion AP, round, AR6060
248380 Automatic Fusion AP, flat, AF2020, FT0424
248381 Automatic Fusion AP, flat, AF2929, FT0438
248382 Automatic Fusion MP, round, direct impingement, XR2929, RTM040
248383 Automatic Fusion MP, round, direct impingement, XR3535, RTM040
248384 Automatic Fusion MP, flat, direct impingement, XF1313, FTM317
248385 Automatic Fusion MP, flat, direct impingement, XF1818, FTM424
248386 Automatic Fusion MP, round, MR3535, RTM040
248387 Automatic Fusion MP, round, MR5757, RTM070
248647 Automatic Fusion, Solvent-Purge



ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco BVBA
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South
Huangpu District
Shanghai 200011
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 432, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN


Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.



Europe
+32 89 770 700
FAX +32 89 770 777
WWW.GRACO.COM

©2012 Graco BVBA 300615ENEU Rev.G 06/12 Printed in Europe.
All other brand names or marks are used for identification purposes and are trademarks of their respective owners.