



XM Plural-Component Sprayers

High-Pressure Equipment for Protective Coatings



PROVEN QUALITY. LEADING TECHNOLOGY.

Graco® XM Series. Advanced. Accurate. Affordable.

Boost your productivity on demanding high-volume, plural-component jobs

Advanced technology and accurate ratio control

Graco XM Plural-Component Sprayers are designed to spray the toughest plural-component materials, with the assurance that you're spraying accurately and on-ratio. Ideally suited for marine, bridge, rail and wind energy applications, each Graco XM is fully configurable – simply start with a base unit (shown below) and select additional components required for your application.

Intuitive User Controls

- Provides real-time display of ratio for ultimate spraying control
- USB drive for data reporting

Heavy-Duty Carbon Steel Frame

- Built-in pallet rack for easy transport

Mix Manifold

- Provides precision mixing and accurate ratio control, even at high flow rates
- Choose standard or remote mount

Mounting Bracket

- Supports up to three fluid heaters

XTR-7 Gun

- System supports multiple spray guns for added productivity
- Base unit includes gun, hose and static mixers

Rear View of Base Unit



Xtreme pumps and Merkur™ flush pump are standard on the base unit. Easy crane transport using eye hooks on air motors.

Graco XM Plural-Component Sprayer (base model)*

* Base model approved for use in hazardous locations is available

Build a System for Your Application

Fully configurable – simply select the accessories required for your material and application

More flexibility means more affordability

With Graco XM Plural-Component Sprayers, you have the flexibility to select the essential equipment on your system – no more, no less – to complete your jobs accurately and reliably. If your application does not require heaters, feed pumps or hoppers, this flexibility may provide you with a lower cost option. The components shown below are available as options on your configured unit. Some assembly is required.

Junction Box

- Conveniently houses switches and breakers for heaters
- Not approved for hazardous locations

Hose Rack Kit

Viscon® Fluid Heaters

- Choose standard or model approved for hazardous locations

Rear Mounted Hoppers



Transfer pumps

- Choose Graco T2 or Monark® 5:1

Twistork® Agitator

- Helps maintain proper material consistency

Material Hoppers

- Side or rear-mount
- Choose 76 or 26 liter (20-gal or 7-gal)

Hopper Heater

- Excellent for highly viscous materials
 - Standard 240-volt, 1500 watt immersion heaters
 - Use optional circulation kit (256273*) for hazardous locations
- *Viscon fluid heater approved for use in hazardous locations must be ordered separately

Caster Kit

Graco XM Plural-Component Sprayer (base model plus options)**

** Not approved for use in hazardous locations unless the base model, all accessories and wiring comply with national, state and local codes

Performance You Can Trust

Advanced technology that boosts your productivity

Packed with features

Whether your application requires a basic machine or one that is fully loaded, the Graco XM provides the technology and performance you need to get the job done faster and more efficiently than ever before.



Advanced controls

The user interface on the Graco XM is intuitive and simple to use. It provides two display modes: “setup” for entering parameters and a basic “run” mode for everyday operation. The user interface monitors and tracks pressure, temperature and flow, and allows you to program maintenance schedules as well.

With a conveniently located USB port, you can easily access and download historical spraying data.

Precise mixing and ratio assurance


Material mixing reaches a new level of precision due to new dosing technology. With the Graco XM, the minor component (or side B material) is injected at high pressure into the major material (side A).

Advanced sensors allow pumps to compensate for pressure fluctuations, resulting in accurate, on-ratio mixing for better yield and less waste.



Remote Mix Manifold

Choose standard, frame-mounted mix manifold or remote mix manifold; both include a pressure gauge that displays fluid output pressure.

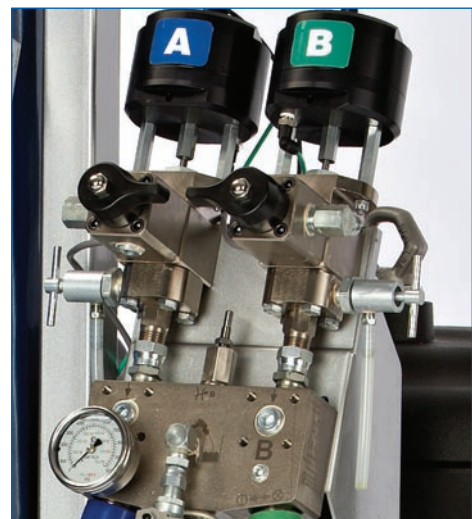

Standard Mix Manifold

Technical Specifications & Configurable Options

Everything you need to make an informed decision

Technical Specifications

Dimensions	
Base Unit (no hoppers).....	99 x 178 x 97 cm (39W x 70H x 38D in)
Side mounted hoppers.....	252 x 178 x 97 cm (99W x 70H x 38D in)
Rear mounted hoppers	145 x 178 x 165 cm (57W x 70H x 65D in)
Mix ratio range	1:1 to 10:1 (in 0.1 increments)
Ratio tolerance range	+/- 5%
Fluid filtration	60 mesh (238 micron standard) <i>(not included on some models)</i>
Flow rates	
Minimum	0.95 lpm (1 qt/min)*
Maximum	11.4 lpm (3 gpm)*
*Actual flow rates vary by material type	
Air inlet	3/4 npt (f)
Fluid inlets without feed kits	1-1/4 npt (m)
Max mixed fluid working pressure	
50:1.....	358 bar, 35.8 MPa (5200 psi)
70:1.....	434 bar, 43.4 MPa (6300 psi)
Air supply pressure range	3.5 to 10.3 bar, 0.35 to 1.0 MPa (50-150 psi)
Max pump air set pressure	
50:1.....	7.0 bar, 0.7 MPa (100 psi)
70:1.....	6.2 bar, 0.62 MPa (90 psi)
Max pump inlet fluid pressure	17 bar, 1.7 MPa (250 psi)
Max air consumption at 100 psi (0.7 MPa, 7.0 bar):	
.....	0.56 m ³ /min/lpm (75 scfm/gpm)
Ambient temperature range	
Operating.....	0° to 54°C (32° to 130°F)
Storage.....	-1° to 71°C (30° to 160°F)
Weight	
Base machine.....	526 kg (1160 lb) <i>(No heaters, hoppers or junction box)</i>
Fully configured	703 kg (1550 lb) <i>(Includes heated hoppers, feed pumps, heaters and junction box)</i>
Sound pressure	86 dBA at 7.0 bar, 0.7 MPa (100 psi)
Fluid viscosity range	200-20,000 cps <i>(heavier viscosities can be sprayed using heat, recirculation and/or pressure feeding)</i>
Wetted parts	
Suction tubes.....	Aluminum
Flush pump.....	Stainless steel, aluminum, carbide, UHMWPE and PTFE
Hoses	Nylon
Pumps (A and B)	Carbon steel, alloy steel, 303, 440, 17-ph grades stainless steel, zinc and nickel plating, ductile iron, tungsten carbide, and PTFE
Metering valves	Carbon steel, nickel plating, carbide, polyethylene, leather
Manifold	Carbon steel, nickel plating, carbide, 302 stainless steel, PTFE, UHMWPE
Mixer	Stainless steel housing with acetal elements
Spray gun	Stainless steel, acetal, polyethylene, nylon, polypropylene, carbide, polyurethane, solvent-resistant o-rings

Configurable options loaded with features



Hoppers

76L (20-gal) hoppers are:

- Jacketed for heated water or oil
- Made of rugged, double-wall polyethylene
- Available in heated* or standard version

26L (6-gal) hoppers are:

- Excellent for high ratio applications



Viscon Fluid Heater*

- 240 VAC, 4000 watts
- Other voltage options sold separately



Transfer Pumps*

- Feeds material to main pumps
- Recommended for highly viscous materials
- Easily mounts on 76L (20-gal) hoppers or drums
- Choose Graco T2 or Monark 5:1 transfer pump



Twistork Agitators

- Helps maintain proper material consistency
- Easily mounts on 76L (20-gal) hoppers or drums
- Approved for use in hazardous locations.

* Models approved for hazardous locations are available

Ordering Information

For easy ordering, visit xm.graco.eu.com and use the Graco configuration tool

Base Unit Includes:


- Frame
- Flush pump
- Dosing valves
- Mix manifold
- Controls
- USB port
- Xtreme Pumps
- Xtreme-Duty Hose
- Two static mixers
- XTR-7 Gun
- Your choice of power supply
- Recirculation kit

Accessory Kits for XM50 and XM70

255963.....	76L (20-gal) hopper (heat source not included)	256263.....	Hose rack kit
256257.....	Hopper heater kit, 240V	256274.....	Twistork agitator kit
256273.....	Hopper/hose heat circulation kit (heater not included)	256275.....	T2 2:1 feed pump kit
256259.....	76L (20-gal) hopper mounting bracket kit	256276.....	Monark 5:1 feed pump kit
256170.....	Hopper fluid outlet kit	256232.....	Agitator & 2:1 drum feed pump kit
256980.....	Remote mix manifold conversion kit	256255.....	Agitator & 5:1 drum feed pump kit
256512.....	Desiccant kit (for use with 76L (20-gal) hoppers)	256260.....	26L (20-gal) hopper installation kit
256262.....	Caster kit	256653.....	Fluid Inlet kit
		256876.....	Electric heated hose power supply kit
		256433.....	President™ 10:1 drum feed kit
		256991.....	Alternator conversion kit

Xtreme-Duty High-Pressure Hoses

386 bar 500 bar



Product Identifier:
H = Hose

Pressure Rating:
5: 386 bar 7: 500 bar

Hose Diameter:
25: 6.4mm (1/4 in) 38: 9.5mm (3/8 in) 50: 12.7mm (1/2 in)

Length:
03: 0.9m (3 ft) 06: 1.8m (6 ft) 10: 3.0m (10 ft) 25: 7.6m (25 ft) 50: 15.2m (50 ft) 1X: 30.5m (100 ft)

*Example:
H53850 is a 5600 psi,
3/8 in, 50 ft hose*

Choose the Right Hose for the Job

Technical Specifications

Working pressure..... 386 bar (5600 psi)
..... 500 bar (7250 psi)

Temperature rating (all sizes)..... -40° to 82°C (-40° to 180°F)

Chemical resistance..... Hose cover resistant to a
..... wide variety of solvents, acids and bases

Weather resistance..... Hose cover has outstanding
resistance to oxygen, ozone, sunlight
and general weather conditions

Electrical properties..... Conductive hose

Xtreme-Duty 386 bar (5600 psi) High-Pressure Hose			
Part #	Length	Hose Diameter	Female NPSM
H52503	0.9 m (3 ft)	6.4 mm (1/4 in)	1/4 in
H52506	1.8 m (6 ft)	6.4 mm (1/4 in)	1/4 in
H52510	3.0 m (10 ft)	6.4 mm (1/4 in)	1/4 in
H52525	7.6 m (25 ft)	6.4 mm (1/4 in)	1/4 in
H52550	15.2 m (50 ft)	6.4 mm (1/4 in)	1/4 in
H5251X	30.5 m (100 ft)	6.4 mm (1/4 in)	1/4 in
H53803	0.9 m (3 ft)	9.5 mm (3/8 in)	3/8 in
H53806	1.8 m (6 ft)	9.5 mm (3/8 in)	3/8 in
H53810	3.0 m (10 ft)	9.5 mm (3/8 in)	3/8 in
H53825	7.6 m (25 ft)	9.5 mm (3/8 in)	3/8 in
H53850	15.2 m (50 ft)	9.5 mm (3/8 in)	3/8 in
H5381X	30.5 m (100 ft)	9.5 mm (3/8 in)	3/8 in
H55010	3.0 m (10 ft)	12.7 mm (1/2 in)	1/2 in
H55025	7.6 m (25 ft)	12.7 mm (1/2 in)	1/2 in
H55050	15.2 m (50 ft)	12.7 mm (1/2 in)	1/2 in
H5501X	30.5 m (100 ft)	12.7 mm (1/2 in)	1/2 in

Xtreme-Duty 500 bar (7250 psi) High Pressure-Hose			
Part #	Length	Hose Diameter	Female NPSM
H72503	0.9 m (3 ft)	6.4 mm (1/4 in)	1/4 in
H72506	1.8 m (6 ft)	6.4 mm (1/4 in)	1/4 in
H72510	3.0 m (10 ft)	6.4 mm (1/4 in)	1/4 in
H72525	7.6 m (25 ft)	6.4 mm (1/4 in)	1/4 in
H72550	15.2 m (50 ft)	6.4 mm (1/4 in)	1/4 in
H7251X	30.5 m (100 ft)	6.4 mm (1/4 in)	1/4 in
H73803	0.9 m (3 ft)	9.5 mm (3/8 in)	3/8 in
H73806	1.8 m (6 ft)	9.5 mm (3/8 in)	3/8 in
H73810	3.0 m (10 ft)	9.5 mm (3/8 in)	3/8 in
H73825	7.6 m (25 ft)	9.5 mm (3/8 in)	3/8 in
H73850	15.2 m (50 ft)	9.5 mm (3/8 in)	3/8 in
H7381X	30.5 m (100 ft)	9.5 mm (3/8 in)	3/8 in
H75010	3.0 m (10 ft)	12.7 mm (1/2 in)	1/2 in
H75025	7.6 m (25 ft)	12.7 mm (1/2 in)	1/2 in
H75050	15.2 m (50 ft)	12.7 mm (1/2 in)	1/2 in
H7501X	30.5 m (100 ft)	12.7 mm (1/2 in)	1/2 in

Ordering Information



Airless Guns

XTR-5 Airless Spray Gun

Maximum working pressure: 345 bar, 34.5 MPa (5000 psi)

- XTR500One inch round handle, four-finger trigger, no tip
- XTR501One inch round handle, four-finger trigger, 519 flat tip
- XTR502Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
- XTR503Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
- XTR504One inch round handle, four-finger trigger, 519 XHD RAC tip
- XTR505One inch round handle, two-finger trigger, 519 XHD RAC tip

XTR-7 Airless Spray Gun

Maximum working pressure: 500 bar, 50.0 MPa (7250 psi)

- XTR700Round handle, four-finger trigger, no tip
- XTR701Round handle, four-finger trigger, 519 flat tip
- XTR702Oval-insulated handle, four-finger trigger, 519 XHD RAC tip
- XTR703Oval-insulated handle, two-finger trigger, 519 XHD RAC tip
- XTR704Round handle, four-finger trigger, 519 XHD RAC tip
- XTR705Round handle, two-finger trigger, 519 XHD RAC tip

Gun Accessories

Accessories

- 287450 Two-finger Trigger Kit
- 287449 Four-finger Round Trigger Kit
- 287451 Four-finger Oval Insulation Trigger Kit
- 246294 254 mm (10 in) Gun Extension, 500 bar, 50 MPa (7250 psi)
- 246295 380mm (15 in) Gun Extension, 500 bar, 50 MPa (7250 psi)
- 246296 457 mm (18 in) Gun Extension, 500 bar, 50 MPa (7250 psi)
- 246297 180° spray nozzle, 7/8-14 UNC-2B, 500 bar, 50 MPa (7250 psi)
- 248837 Gun Repair Kit, Includes Gasket, Needle and Seat
- 287032 Filter, 60 Mesh
- 287033 Filter, 100 Mesh
- 287034 Filter, 60 and 100 Mesh Combination



XHD RAC SwitchTip

ORIFICE SIZE - INCHES

		.107	.109	.111	.113	.115	.117	.119	.121	.123	.125	.127	.129	.131	.133	.135	.137	.139	.141	.143	.145	.147	.149	.151	.153	.155	.157	.159	.161	.163	.165	.167	.169	.171	.175	.181		
FAN WIDTH	(51-102) 2-4	107	109	111	113	115	117	119	121							235		139																				
	(102-152) 4-6		209	211	213	215	217	219	221		225	227	229	231				239																				
	(152-203) 6-8	307	309	311	313	315	317	319	321	323	325	327	329	331	333	335	337	339	341	343	345	347			351		355											
	(203-254) 8-10		409	411	413	415	417	419	421	423	425	427	429	431	433	435	437	439	441	443	445	447	449		451		455		459	461	463	465	467		471	475	481	
	(254-305) 10-12		509	511	513	515	517	519	521	523	525	527	529	531	533	535	537	539	541	543	545	547	549		551	553	555	557		561	563	565	567		571	575		
	(305-356) 12-14		609	611	613	615	617	619	621	623	625	627	629	631	633	635	637	639	641	643	645	647	649		651		655	657	659	661	663	665	667	669	671	675		
	(356-406) 14-16			711	713	715	717	719	721	723	725	727	729	731	733	735	737	739	741	743			749		751	753	755		761		767		771					
	(406-457) 16-18				813	815	817	819	821	823	825	827	829	831	833	835	837	839	841	843					851		855			861	863	867						
(457-508) 18-20										923	927					931	933	935	937	939																		
Flow Rate (gpm)		.05	.09	.12	.18	.24	.31	.38	.47	.57	.67	.74	.90	1.03	1.17	1.31	1.47	1.63	1.8	1.98	2.17	2.37	2.58	2.79	4.26	3.25	3.49	3.74	4.0	4.26	4.53	4.82	5.11	5.41	6.4	7.04		
Flow Rate (gpm)		.20	.33	.49	.69	.91	1.17	1.47	1.79	2.15	2.54	2.96	3.42	3.90	4.42	4.98	5.56	6.18	6.83	7.51	8.23	8.98	9.76	10.57	16.13	12.29	13.20	14.14	15.12	16.13	17.17	18.24	19.34	20.48	22.85	26.66		

Water @ 2000 psi (138 bar, 13.8 MPa) - paints with a higher viscosity will decrease the flow rate. Example: for a tip with a .039 in orifice and a 254 mm (10-in) pattern, order XHD539

Graco XHD Guard

- XHD001 XHD RAC Guard for pressures up to 500 bar, 50 MPa (7250 psi)
- XHD010 Seat and Seal Kit (5-pack)



Other Accessories

Heated Hose - 345 bar, 34.5 MPa (5000 psi), 15 m (50 ft)

Not approved for hazardous locations

- 248907Hose Set, ID 6.3 x 9.5 mm (1/4 (A) x 3/8 (B))
- 248908Hose Set, ID 9.5 x 9.5 mm (3/8 (A) x 3/8 (B))

Fittings

- 15B729 ..Coupling, 500 bar, 50.0 MPa (7250 psi), 3/8 npt (f) x 3/8 npsm (m)
- 150287.....Coupling, 500 bar, 50.0 MPa (7250 psi), 3/8 npt (f) x 1/4 npt (m)
- 214925..... Swivel, 345 bar, 34.5 MPa (5000 psi), 3/8 npt (f) x 1/4 npsm (f)
- 236987..Swivel, 500 bar, 50.0 MPa (7250 psi), 1/4 npsm (m) x 1/4 npsm (f)
- 189018 Swivel, 399 bar, 39.9 MPa (5800 psi), 1/4 npsm (m) x 1/4 npsm (f)
- 156971.....Nipple, 500 bar, 50.0 MPa (7250 psi), 1/4 npt x 1/4 npt (mbe)
- 165198.....Nipple, 500 bar, 50.0 MPa (7250 psi), 1/4 npt x 3/8 npt (mbe)
- 162449.....Nipple, 500 bar, 50.0 MPa (7250 psi), 1/4 npt x 1/2 npt (mbe)
- 159239.....Nipple, 500 bar, 50.0 MPa (7250 psi), 3/8 npt x 1/2 npt (mbe)
- 158491.....Nipple, 500 bar, 50.0 MPa (7250 psi), 1/2 npt x 1/2 npt (mbe)

Viscon HP Fluid Heaters - Compatible with Graco XM junction box

Approved for hazardous locations

- 245848.....Hazardous location, 120 VAC, 2300 watts, 19.2 amps
- 245863.....Hazardous location, 240 VAC, 4000 watts, 16.7 amps
- 246254.....Hazardous location, 380 VAC, 4000 watts, 10.5 amps
- 245864.....Hazardous location, 480 VAC, 4000 watts, 8.3 amps

Viscon HP Fluid Heaters - Compatible with Graco XM junction box

Not approved for hazardous locations

- 245867.....Non-hazardous location, 120 VAC, 2300 watts, 19.2 amps
- 245869..... Non-hazardous location, 240 VAC, 4000 watts, 16.7 amps
- 246276..... Non-hazardous location, 380 VAC, 4000 watts, 10.5 amps
- 245870..... Non-hazardous location, 480 VAC, 4000 watts, 8.3 amps

Pump Lower Filter Screens

2-Pack 25-Pack Description

- 224458 238436 30 mesh (595 micron)
- 224459 238438 60 mesh (290 micron)
- 224468 238440 100 mesh (149 micron)

Other Accessories

- 511352 Static mixer, 3/8 npt SST pipe, 12 SST element, 500 bar
- 15E592 Static mixer housing, 3/8 npt SST, 500 bar.
Uses plastic element below
- 246078 Scuff guard, 15.2 m (50 ft) braided polyethylene mesh
- 246456 Scuff guard, 15.2 m (50 ft) polyethylene bag
- 248927 Element mixer kit, plastic 12 element sticks, 25 pack
- 206995 Graco throat seal liquid (TSL), 0.9L (1 qt)
- 206996 Graco throat seal liquid (TSL), 3.8 L (1 gal)



ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

CONTACT

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612.623.6000
Fax: 612.623.6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32.89.770.700
Fax: 32.89.770.777

ASIA PACIFIC

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81.45.593.7300
Fax: 81.45.593.7301

ASIA PACIFIC

CHINA

Graco Hong Kong Ltd.
Representative Office
Room 118 1st Floor
No.2 Xin Yuan Building
No.509 Cao Bao Road
Shanghai, P.R. China 200233
Tel: 86.21.649.50088
Fax: 86.21.649.50077

ASIA PACIFIC

KOREA

Graco Korea Inc.
Choheung Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-Si, Gyunggi-Do,
Korea 431-060
Tel: 82(Korea).31.476.9400
Fax: 82(Korea).31.476.9801

All written and visual data contained in this document are based on the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.

Europe
+32 89 770 700
FAX +32 89 770 777
WWW.GRACO.BE